

WAAS CH 72809 W18A	APP CRS 180°	Rwy Idg 8536 TDZE 653 Apt Elev 656
--	------------------------	---

RNAV (GPS) RWY 18

LA CROSSE RGNL (LSE)

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27° C or above 54° C. When local altimeter setting not received, use Winona altimeter setting; increase LPV DA to 987 feet, LNAV/VNAV DA to 1257 feet and all MDA 60 feet.


A Increase LNAV/VNAV all Cats visibility $\frac{1}{4}$ SM and Circling Cat visibility $\frac{1}{4}$ SM.

☼ -22°C For inoperative MALSR, increase LPV all Cats visibility $\frac{1}{4}$ SM. LNAV minimums NA with Winona altimeter setting. Baro-VNAV and VDP NA when using Winona altimeter setting. Circling to Rwy 22 NA at night.

MALSR

MISSED APPROACH:
Climb to 3000 direct
PKRNA and hold.

ATIS 124.95	MINNEAPOLIS CENTER 128.6 363.0	LA CROSSE TOWER ★ 118.45 (CTAF) 0 251.075	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

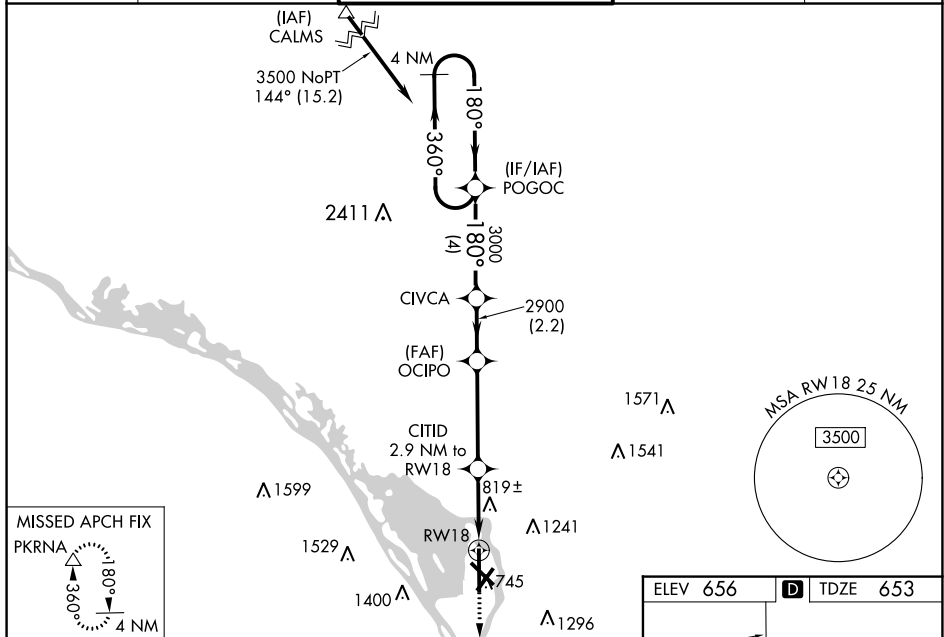

4 NM Holding Pattern

POGOC

3500 ← 360°

180° →

3000

2900

2900

1620

2900

2.9 NM to RW18

1.8 NM to RW18

RW18

GP 3.00° TCH 55

4 NM

2.2 NM

3.9 NM

1.1

1.8

3000

PKNRA

* LNNAV only.

CATEGORY	A	B	C	D
LPV DA	925-1/2 272 (300-1/2)			
LNNAV/VNAV DA	1204-1/2 551 (600-1/2)			
LNNAV MDA	1360-1/2 707 (800-1/2)		1360-1 707 (800-1/2)	1360-1 3/4 707 (800-1 3/4)
CIRCLING	1360-1 704 (800-1)	1460-1 804 (900-1)	1760-3 1104 (1200-3)	1820-3 1164 (1200-3)

