

APP CRS	Rwy Idg	11259
071°	TDZE	128
	Apt Elev	128

RNAV (RNP) Z RWY 7L

LOS ANGELES INTL (LAX)


▼

For uncompensated Baro-VNAV systems, procedure NA below 5°C (41°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized.
For inop ALS, increase RNP 0.11 all Cats visibility to RVR 5000 and RNP 0.30 all Cats visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 3000 on track 071° to FILBA and on track 072° to DOWNE and hold.

D-ATIS	SOCAL APP CON	LOS ANGELES TOWER	GND CON	CLNC DEL	CPDLC
ARR 133.8	124.3 363.2 (APCH FM WEST)	N 133.9 239.3	N 121.65 327.0	120.35	
DEP 135.65	124.5 235.975 (225°-044°)	S 120.95 379.1	S 121.75 327.0 W 121.4 327.0	327.0	
	128.5 360.7 (045°-089°)				

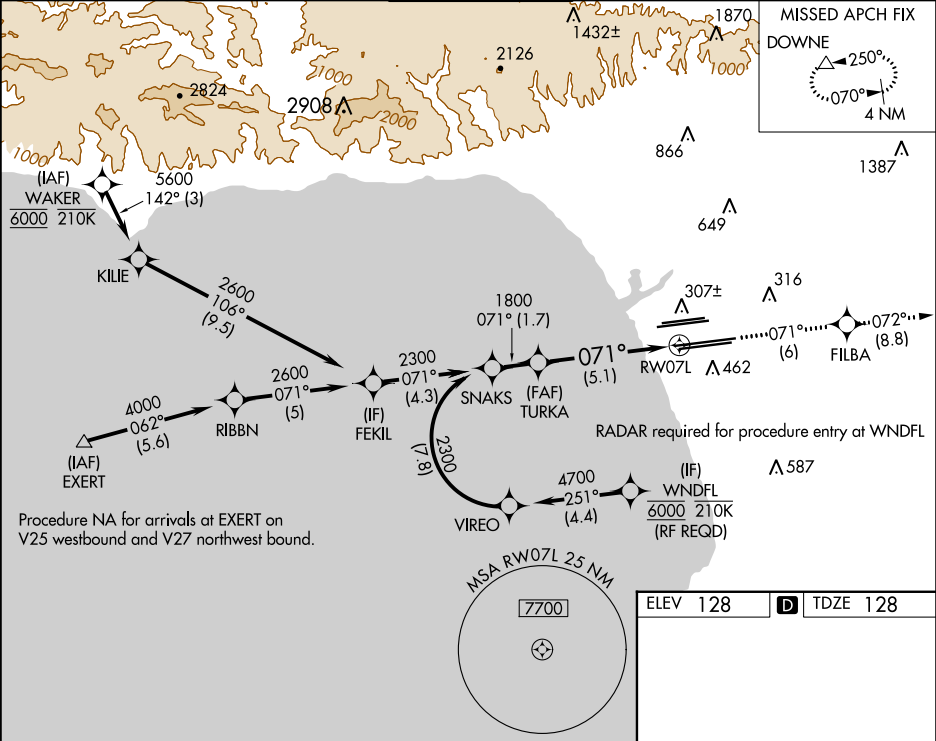

VGSI and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 83).			
3000	FILBA	tr 071°	DOWNE
		tr 072°	
2300	SNAXS		
1800	TURKA		
GP 3.00°			
TCH 59°			
	1.7 NM	5.1 NM	
CATEGORY	A	B	D
RNP 0.11 DA	441/24	313 (400-½)	
RNP 0.30 DA	485/40	357 (400-¾)	
AUTHORIZATION REQUIRED			

ELEV 128

TDZE 128

TDZ/CL Rwy 6R, 7L, 24R, and 25L
HIRL all Rwy