


# EXBOX TWO DEPARTURE (RNAV)

**TOP ALTITUDE:**  
**3000**




D-ATIS  
125.85  
CLNC DEL  
119.5 290.275  
CPDLC  
GND CON  
121.9 348.6  
JACKSONVILLE TOWER  
118.3 317.7  
JACKSONVILLE DEP CON  
124.9 308.4

**TAKEOFF MINIMUMS:**

Rwys 8, 14, 26, 32: Standard with minimum climb of 500' per NM to 540.

- NOTE: RNAV 1.
- NOTE: Turbojets only.
- NOTE: DME/DME/IRU or GPS Required.
- NOTE: RADAR Required.
- NOTE: If unable to accept climb rate, advise ATC on initial contact.

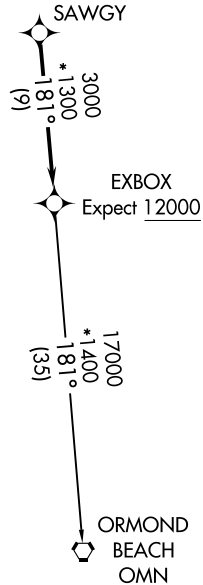

NOTE: Chart not to scale.

## DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RUNWAY 8: Climb heading 077° to 540, then climb to assigned altitude on heading 077° or as assigned by ATC, thence . . . .
- TAKEOFF RUNWAY 14: Climb heading 137° to 540, then climb to assigned altitude on heading 137° or as assigned by ATC, thence . . . .
- TAKEOFF RUNWAY 26: Climb heading 257° to 540, then climb to assigned altitude on heading 257° or as assigned by ATC, thence . . . .
- TAKEOFF RUNWAY 32: Climb heading 317° to 540, then climb to assigned altitude on heading 317° or as assigned by ATC, thence . . . .

. . . . expect radar vectors to SAWGY, then on track 181° to EXBOX. Maintain 3000 or as assigned by ATC, expect clearance to filed altitude within ten (10) minutes after departure.

ORMOND BEACH TRANSITION (EXBOX2.OMN):

# EXBOX TWO DEPARTURE (RNAV)

SE-3, 11 JUL 2024 to 08 AUG 2024

SE-3, 11 JUL 2024 to 08 AUG 2024