

ALICE, TEXAS

AL-481 (FAA)

23278

LOC/DME I-ALI <u>109.3</u> Chan 30	APP CRS 308°	Rwy Idg 5997 TDZE 174 Apt Elev 178
--	------------------------	---

LOC/DME RWY 31
ALICE INTL (ALI)


RADAR required for procedure entry from Corpus Christi CRP VORTAC.

A VDP NA when using Nueces County altimeter setting. When local altimeter setting not received, use Nueces County altimeter setting and increase all MDAs 60 feet and S-LOC 31 visibility Cat C/D $\frac{1}{4}$ SM, and Circling visibility Cat D $\frac{1}{4}$ SM. For inop ALS when using Nueces County altimeter setting, increase S-31 Cats C, D visibility to $1\frac{1}{2}$ SM.

MALS

MISSED APPROACH: Climb to 1500 then climbing left turn to 2000 on direct ALI VOR and hold.

ASOS 119.225	KINGSVILLE APP CON ★ 119.9 290.45	UNICOM 123.0 (CTAF) 0
------------------------	---	--

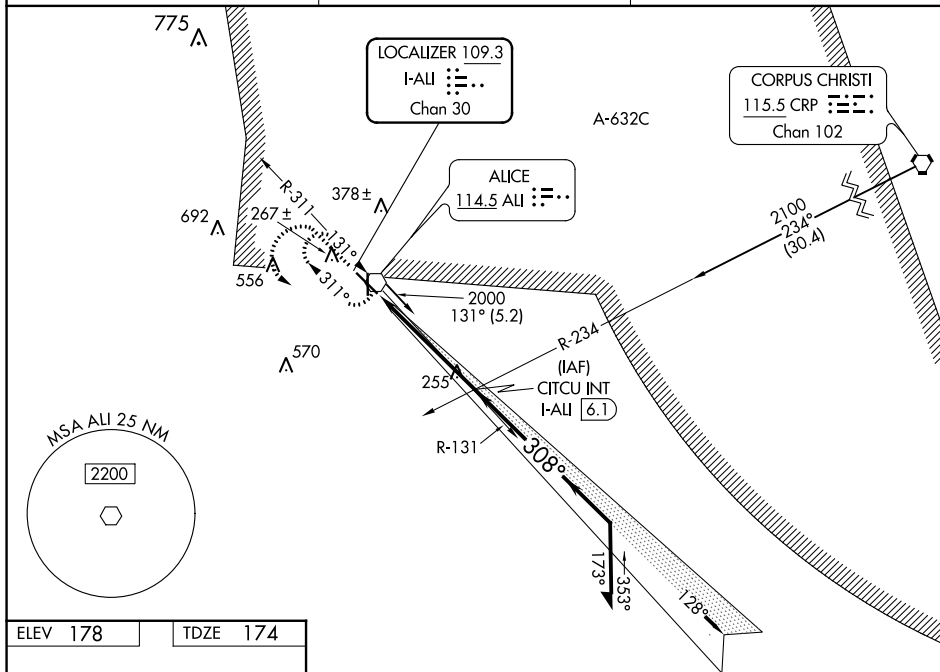

ELEV 178		TDZE 174
----------	--	----------

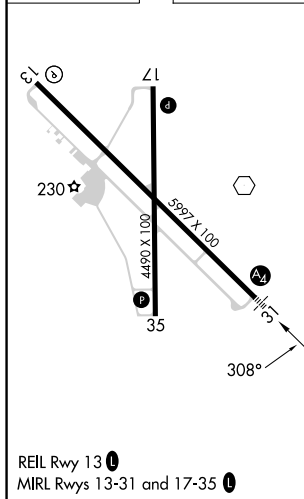


Diagram illustrating the geometry of a turn in a flight path. The diagram shows a horizontal segment of 3.9 NM followed by a turn. The turn is defined by a radius of 1 NM and a turn angle of 3.04 degrees. The turn is labeled "TCH 47". The turn is also labeled "I-ALI 1.2" and "I-ALI 2.1". The turn is also labeled "CITCU INT I-ALI 6.1". The turn is also labeled "2000" and "1800". The turn is also labeled "128°" and "308°". The turn is also labeled "Remain within 10 NM".

ALICE, TEXAS

Orig-F 05OCT23

27°44'N-98°02'W

ALICE INTL (ALI)

LOC/DME RWY 31

SC-3, 21 MAR 2024 to 18 APR 2024