

WAAS CH 72905 W04A	APP CRS 039°	Rwy Idg TDZE 2885 Apt Elev 2885
--	------------------------	---

RNAV (GPS) RWY 4

LIBERAL MID-AMERICA RGNL (L.B.L.)

RNP APCH - GPS.


▼

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.
Circling NA east of Rwy 17-35. When local altimeter setting not received, use Guymon altimeter setting and increase LPV DA to 3248 feet; increase LNAV/VNAV DA to 3412 feet and all visibilities ¾ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ¾ SM. Baro-VNAV NA when using Guymon Muni altimeter setting. VDP NA when using Guymon Muni altimeter setting.

MISSED APPROACH: Climb to 4800 direct NULEE and hold.

AWOS-3PT 118.375	KANSAS CITY CENTER 134.0 257.625	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

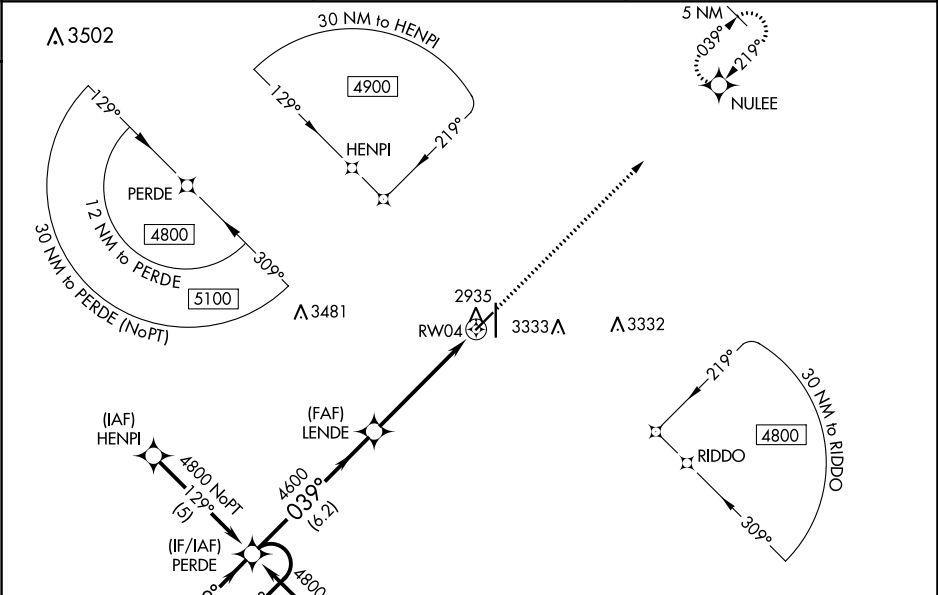

ELEV 2885	D	TDZE 2885
-----------	----------	-----------

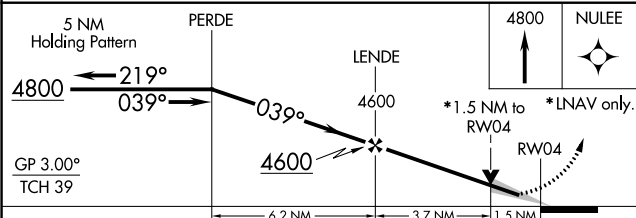

CATEGORY	A	B	C	D
LPV DA	3136-1	251 (300-1)		
LNAV/ VNAV DA	3300-1 ¾	415 (500-1 ¾)		
LNAV MDA	3400-1 515 (600-1)	3400-1 ¾ 515 (600-1 ¾)		
CIRCLING	3400-1 515 (600-1)	3640-2 ¼ 755 (800-2 ¼)	3640-2 ½ 755 (800-2 ½)	

