

APP CRS
197°

Rwy Idg
7001

TDZE
-1

Apt Elev
4

RNAV (RNP) Z RWY 20

LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

RNP AR APCH - GPS.


▼ For uncompensated Baro-VNAV systems, procedure NA below -1°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 6000.

MALS

ⓐ

MISSED APPROACH: Climb to 2000 on track 197° to POLY and track 109° to SAFES and hold.

D-ATIS 127.55	NEW ORLEANS APP CON WEST 125.5 350.35 EAST 133.15 290.3	NEW ORLEANS TOWER 119.5 254.3	GND CON 121.9 273.525	CLNC DEL 120.925	CPDLC
------------------	---	----------------------------------	--------------------------	---------------------	-------

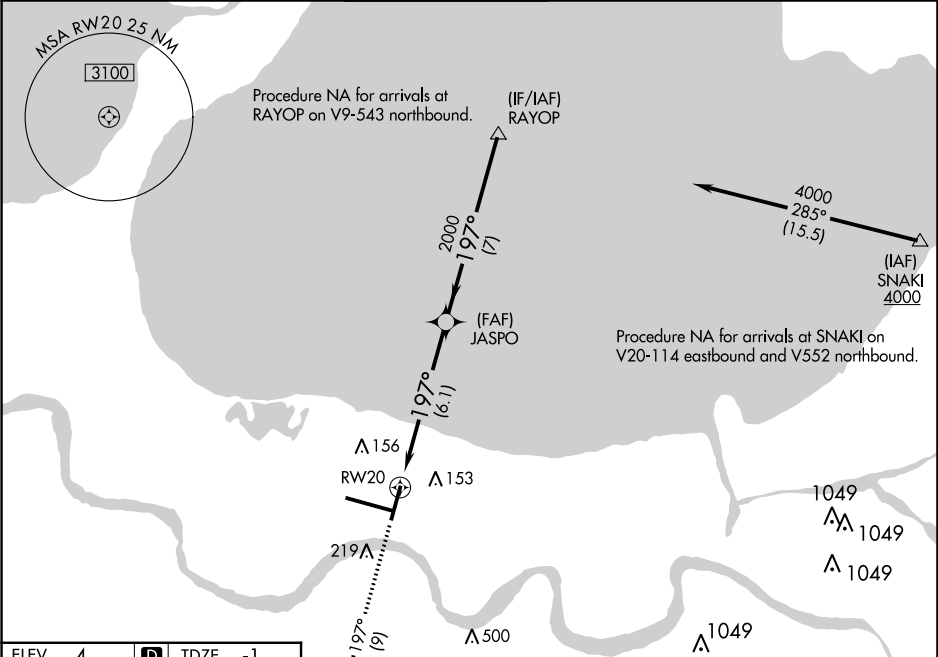

ELEV 4

D

TDZE -1

MISSED APCH FIX

SAFES

174°

354°

4 NM

2000

tr 197°

POLY

tr 109°

SAFES

RAYOP

4000

JASPO

2000

197°

2000

RW20

GP 3.00°

TCH 52

CATEGORY	A	B	C	D
RNP 0.11 DA		363/40	364 (400-¾)	
RNP 0.30 DA		414/50	415 (500-1)	

AUTHORIZATION REQUIRED