

LOC I-JBD <u>108.95</u>	APP CRS 053°	Rwy Idg 5342 TDZE 124 Apt Elev 125
-----------------------------------	------------------------	---


ILS or LOC RWY 5
LUMBERTON RGNL (LBT)

ADF required.

T When local altimeter setting not received, use Maxton altimeter setting and increase DA to 416 feet and all visibility $\frac{1}{8}$ SM; increase all MDA to 60 feet and S-LOC 5 visibility
A Cat C $\frac{1}{8}$ SM and Circling visibility Cat C $\frac{1}{4}$ SM. Circling Rwy 13, 31 NA at night.
Autopilot coupled approach NA below 1250.

MISSED APPROACH: Climb to 1000 then climbing right turn to 1900 direct JIGEL LOM and hold.

ASOS 134.775	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF) ①
------------------------	---	---------------------------------

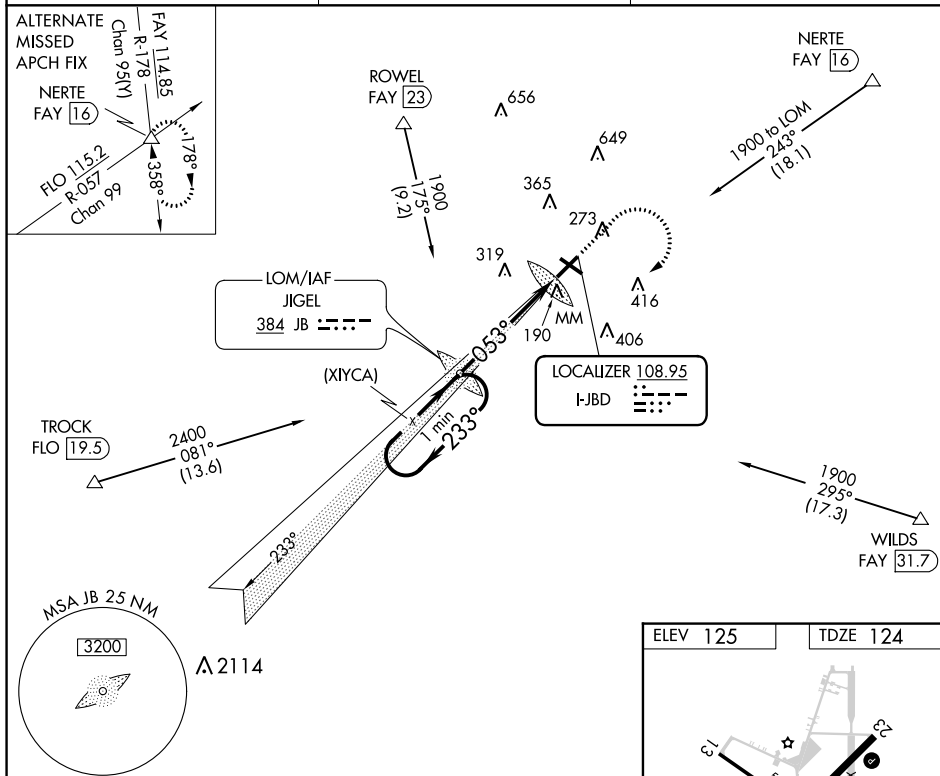

One Minute Holding Pattern

JB
JIGEL LOM
1799

1900 ← 233°
053° → 1900

GS 3.00°
TCH 60

4.6 NM
0.4

1000
1900
JB

CATEGORY	A	B	C	D
S-ILS 5	360- ³ / ₄	236 (300- ³ / ₄)		NA
S-LOC 5	600-1	476 (500-1)	600-1 ⁷ / ₈ 476 (500-1 ⁷ / ₈)	NA
CIRCLING	660-1	535 (600-1)	720-1 ¹ / ₂ 595 (600-1 ¹ / ₂)	NA

