

LOM TU <u>420</u>	APP CRS 001°	Rwy Idg TDZE Apt Elev	7150 347 347
-----------------------------	------------------------	-----------------------------	---

NDB RWY 36
TUPELO RGNL (TUP)

▼ When local altimeter setting not received, use Columbus AFB altimeter setting and increase all MDA 120 feet, increase S-36 Cats C and D visibility $\frac{3}{8}$ SM and




▲ NA Circling Cats C and D $\frac{1}{2}$ SM. For inop ALS, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to $1\frac{3}{8}$ SM. For inop ALS when using Columbus AFB altimeter setting, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to $1\frac{3}{8}$ SM.

MALSR



MISSED APPROACH:
Climb to 1500 then
climbing left turn to 3000
direct TU LOM and hold.

ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER ★ 118.775 (CTAF) 0 254.275	GND CON 121.825 254.275
-----------------	--------------------------------	--	----------------------------

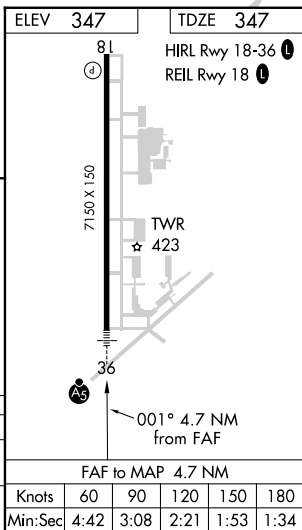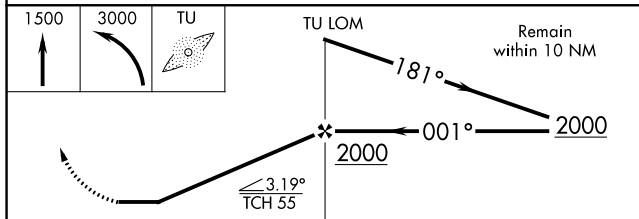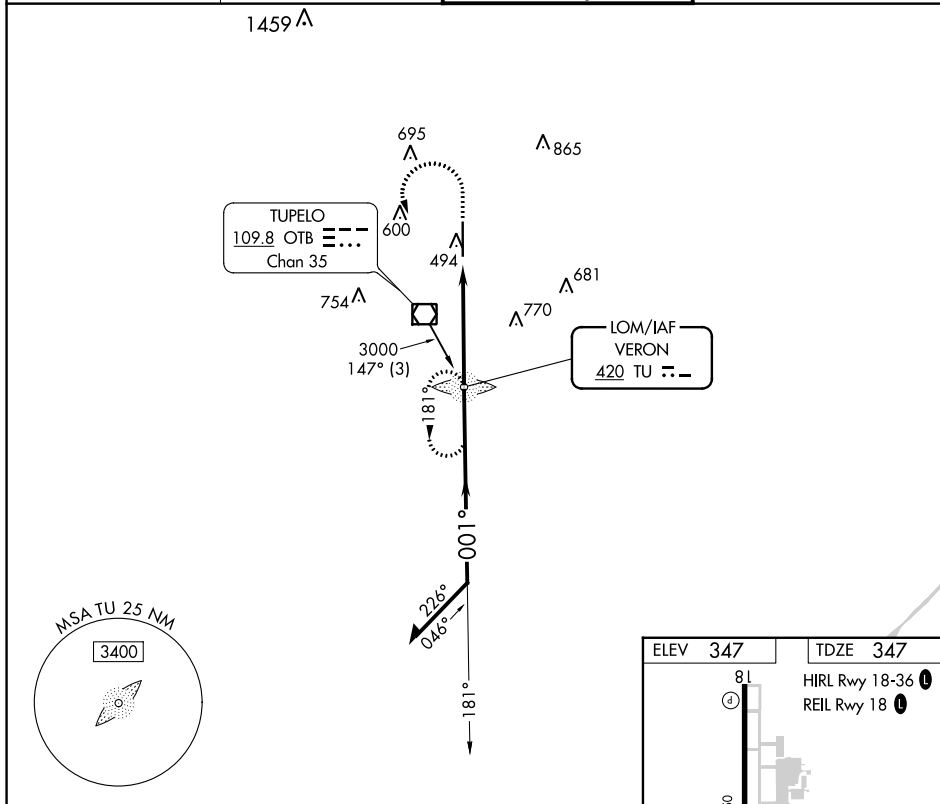

CATEGORY		A	B	C	D						
S- 36		840- ³ / ₄ 493 (500- ³ / ₄)		840-1 493 (500-1)		FAF to MAP 4.7 NM					
	CIRCLING	840-1 493 (500-1)		900-1 ¹ / ₂ 553 (600-1 ¹ / ₂) 1140-2 ¹ / ₂ 793 (800-2 ¹ / ₂)		Knots	60	90	120	150	180
						Min:Sec	4:42	3:08	2:21	1:53	1:34