


SAN DIEGO, CALIFORNIA

LOC/DME I-NKX 111.15 Chan 48(Y)	APCH CRS 243°	Rwy Idg 8001 TDZE 477 Arpt Elev 477	24L 12,000 24R 475 477
---	-------------------------	--	---

ILS Z or LOC/DME Z RWY 24R

AL-903 [USN] MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

DME and RADAR required.					MISSED APPROACH: Climb to 1500, then climbing right turn to 3000 via heading 340°. Expect radar vectors.							
▼ ** When ALS inop, increase vis to ¾ mile. ** When ALS inop, increase CAT AB vis to 1 mile, CAT CDE vis to 1 ½ miles. *** CAT E circling not authorized S of Rwy 6R-24L.												
ATIS ★ 133.475 352.0		SOCAL APP CON 132.2 269.1		FOSS TOWER ★ 135.2 298.925 0		GND CON 128.625 307.325		CLNC DEL 125.975 254.325		LA CENTER 291.7		ASR/ PAR

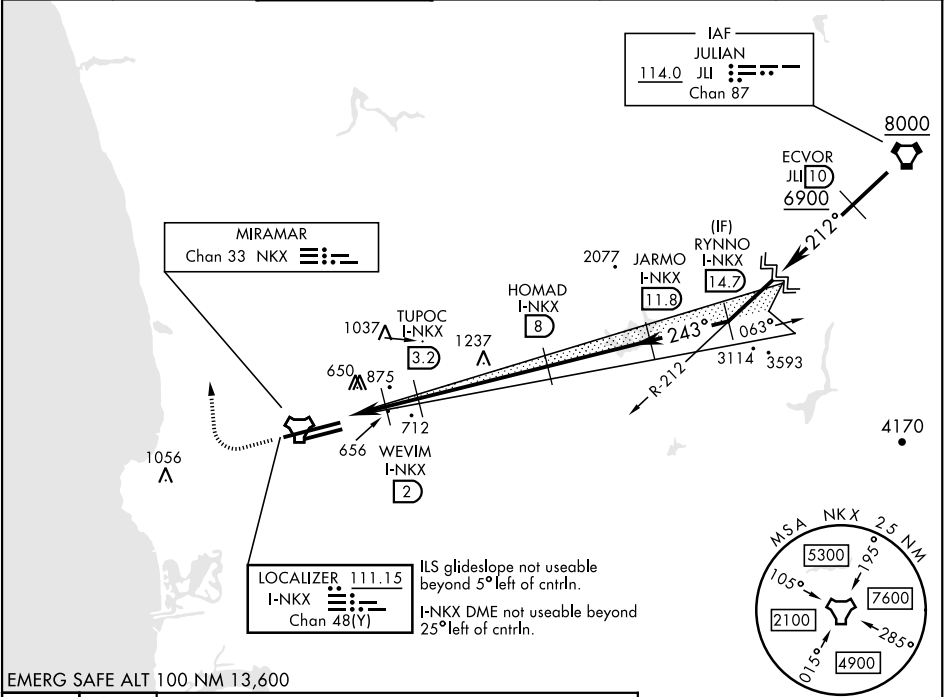

EMERG SAFE ALT 100 NM 13,600

1500

↑

3000

hdg
340°

VGSI and descent
angles not coincident.

TACAN

LOC DME

ZENPA I-NKX

WEVIM I-NKX

TUPOC I-NKX

HOMAD I-NKX

JARMO I-NKX

RYNNO I-NKX

0.6

2

3.2

8

11.8

14.7

2998

243°

3800

4700

1200

1600

3000

GS 3.00°

TCH 53

0.4

1.4 NM

1.2 NM

4.8 NM

CATEGORY	A	B	C	D	E
S-ILS 24R*	675 - ½		200	(200- ½)	
S-LOC/DME 24R**	920- ½	445 (500- ½)	920- ¾	445 (500- ¾)	
SIDESTEP 24L	920-1	443 (500-1)	920-1 ½ 443 (500-1 ½)	920-2 443 (500-2)	
CIRCLING***	940-1 463 (500-1)	960-1 483 (500-1)	960-1 ½ 483 (500-1 ½)	1180-2 ¼ 703 (800-2 ¼)	1360-3 883 (900-3)

ELEV 477

TDZE 24L 477

TDZE 24R 475

12,000
x 500

9001
x 200

1000
x 100

0.4% DOWN

0.6% DOWN

063°

243°

TWR

ATIS

HIRL Rwy 6L-24R

HIRL Rwy 6R-24L

SAN DIEGO, CALIFORNIA

32°52'N-117°09'W

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

Amtd 1 29DEC22

ILS Z or LOC/DME Z RWY 24R

SW-3, 21 MAR 2024 to 18 APR 2024

SW-3, 21 MAR 2024 to 18 APR 2024