

SAN DIEGO, CALIFORNIA

23026

RNAV (GPS) RWY 24L

WAAS CH 54028 W24A	APCH CRS 243°	Rwy Idg TDZE Arpt Elev	8001 477 477
--------------------------	------------------	------------------------------	--------------------


AL-903 [USN]

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

RNP APCH		MISSED APPROACH: Climb to 3000 direct HUVEL, 288° track to REDIN and hold.			
ATIS ★ 133.475 352.0	SOCAL APP CON 132.2 269.1	FOSS TOWER ★ 135.2 298.925 0	GND CON 128.625 307.325	CLNC DEL 125.975 254.325	LA CENTER 291.7 ASR/ PAR

For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (130°F).

CAUTION: Intermediate deceleration segment descent gradient 309 FPM is greater than 150 FPM.

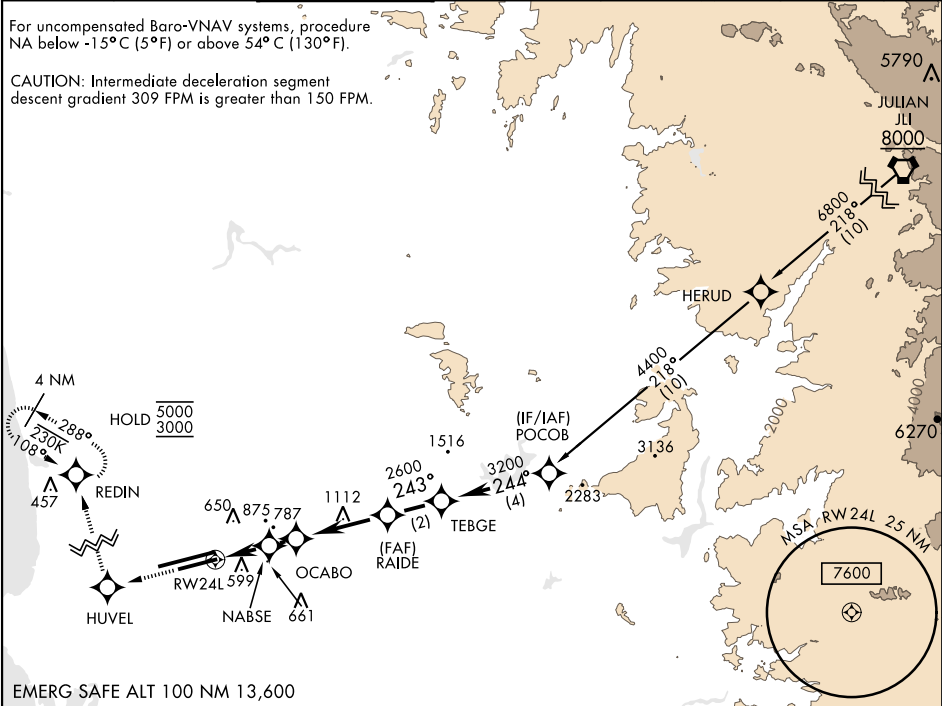

EMERG SAFE ALT 100 NM 13,600

3000 ↑		HUVEL ✧		tr 288° REDIN ⊙		ELEV 477		TDZE 477	
RW24L		NABSE		OCABO		RAIDE		TEBGE	
2 NM		1 NM		3.5 NM					
1140		1460		2600		244°		4400	
GP 3.00°									
TCH 46°									
CATEGORY		A		B		C		D	
LPV DA		677-¾		200		(200-¾)			
LNAV/VNAV DA		730-¾ 253 (300-¾)		741-⅞ 264 (300-⅞)		749-⅞ 272 (300-⅞)		760-⅞ 283 (300-⅞)	
LNAV MDA		960-1		483 (500-1)		960-1⅓		483 (500-1⅓)	
CIRCLING		960-1		483 (500-1)		960-1½ 483 (500-1½)		1180-2¼ 703 (800-2¼)	

HIRL Rwy 6L-24R

HIRL Rwy 6R-24L