

LOC/DME I-ONA 109.35 Chan 30 (Y)	APP CRS 300°	Rwy Idg TDZE 656 Apt Elev 656
--	------------------------	---

ILS Y or LOC Y RWY 30

WINONA MUNI-MAX CONRAD FIELD (ONA)


DME required.

VDP N/A with La Crosse altimeter setting. When local altimeter setting not received, use La Crosse altimeter setting and increase S-ILS 30 DA to 1127 and all visibilities ½ mile, increase all MDA 60 feet, and visibility S-LOC 30 Cat C/D ½ mile, and Circling Cat B ¼ mile. For inop ALS, increase S-ILS 30 all Cats visibility to 1¾ mile, increase S-LOC 30 Cats C/D visibility to 1¾ mile. For inop ALS when using La Crosse altimeter setting, increase S-ILS 30 all Cats visibility to 1¾ mile, increase S-LOC 30 Cats C/D visibility to 1¾ mile.

MALSR

MISSED APPROACH:
Climb to 1800 then climbing left turn to 3000 on RST VOR/ DME R-056 to VUZID INT and hold.

AWOS-3 118.075	MINNEAPOLIS CENTER 128.6 363.0	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

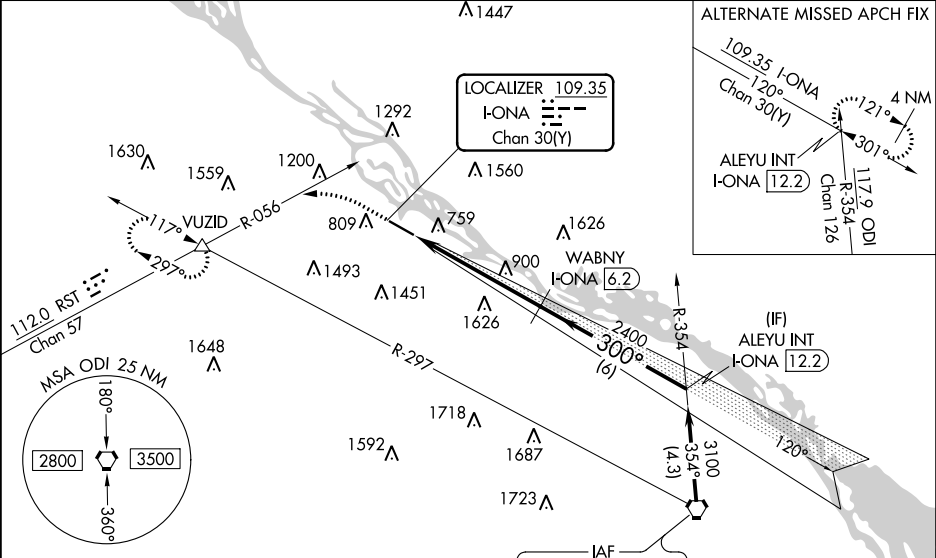

ELEV 656 D TDZE 656

REIL Rwy 12
MIRL Rwy 12-30

NODINE

117.9 ODI

Chan 126

1800

3000

VUZID

↑

RST

R-056

△

*LOC only

I-ONA

0.9

*I-ONA

2.5

1.6 NM

3.7 NM

6 NM

WABNY

I-ONA

6.2

2400

3100

300°

2400

GS 3.00°

TCH 50

Δ2045

ALEYU INT

I-ONA

12.2

CATEGORY	A	B	C	D
S-ILS 30	1074-1½ 418 (500-1½)			
S-LOC 30	1220-½ 564 (600-½)	1220-1¼ 564 (600-1¼)		
CIRCLING	1560-1¼ 904 (1000-1¼)	1600-1¼ 944 (1000-1¼)	1780-3 1124 (1200-3)	1980-3 1324 (1400-3)