

WAAS CH 40329 W30A	APP CRS 300°	Rwy Idg 5199 TDZE 656 Apt Elev 656
--	------------------------	---

RNAV (GPS) RWY 30

WINONA MUNI-MAX CONRAD FIELD (ONA)

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use La Crosse altimeter setting and increase all LPV DA to 1064 feet and visibility ½ mile all Cats, all LNAV/VNAV DA to 1193 and visibility ½ mile all Cats, and all MDA 60 feet, increase LNAV Cat C/D and Circling Cat B visibility ¼ mile. For inop ALS, increase LPV all Cats visibility to 1 ½ mile. For inop ALS when using La Crosse altimeter setting, increase LPV all Cats visibility to 1 ¾ mile, and LNAV Cats C/D visibility to 2 mile. Baro-VNAV and VDP NA when using La Crosse altimeter setting.

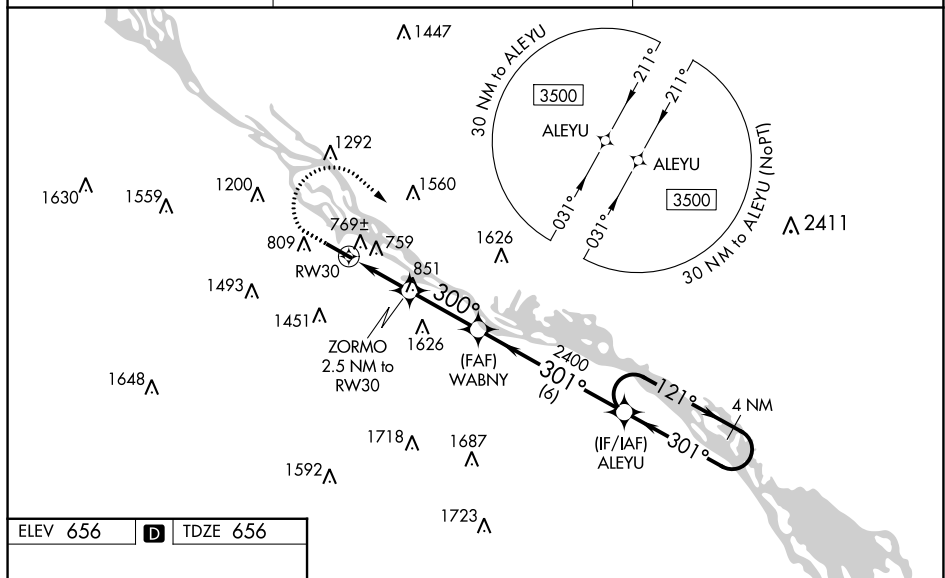
MALSR



MISSED APPROACH:
Climb to 1800 then
climbing right turn to
3500 direct ALEYU and
hold.

AWOS-3
118.075

MINNEAPOLIS CENTER
128.6 363.0

UNICOM
122.8 (CTAF) **L**

1800 ↑	3500 ↗	ALEYU ✦				
* LNAV only	ZORMO 2.5 NM to RW30 * 1.9 NM to RW30 RW30		WABNY 2400	301°	121° →	3500
	1.9 NM	0.6 NM	2.8 NM	6 NM		
CATEGORY	A	B	C	D		
LPV DA	1011-¾		355 (400-¾)			
LNAV/VNAV	1140-1⅞		484 (500-1⅞)			
LNAV MDA	1280-½ 624 (700-½)		1280-1⅓ 624 (700-1⅓)			
C CIRCLING	1560-1¼ 904 (1000-1¼)	1600-1¼ 944 (1000-1¼)	1780-3 1124 (1200-3)	1980-3 1324 (1400-3)		