

WAAS CH 72711 W13A	APP CRS 133°	Rwy Idg TDZE 1115 Apt Elev 1119	6504
--	------------------------	---	-------------

RNAV (GPS) RWY 13

THIEF RIVER FALLS RGNL (TVF)

▼


Baro-VNAV and VDP NA when using Crookston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

⚠

When local altimeter setting not received, use Crookston altimeter setting: increase LPV DA to 1447 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1518 feet and all visibilities ¼ SM; increase all MDAs 100 feet and visibility Cats C and D ¾ SM.

MISSED APPROACH:
Climb to 2700 direct
ZUDOL and hold.

AWOS-3PT 119.025	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

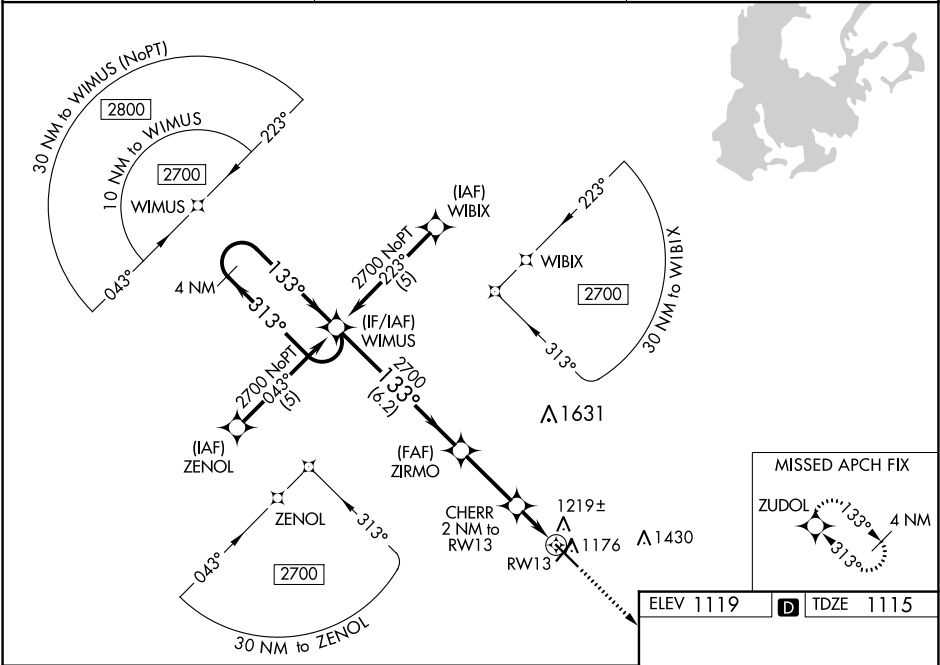

4 NM Holding Pattern WIMUS ZIRMO CHERR 2 NM to RW13 2700 ZUDOL 2700 GP 3.00° TCH 40° 2700 133° 313° 133° 2700 *1780 *1 NM to RW13 RW13 *LNAV only 6.2 NM 2.8 NM 1 NM 1 NM					133° 13 32 1168 ± 491 X 15 630 X 150 AS 5
CATEGORY	A	B	C	D	
LPV DA	1365-1 250 (300-1)				
LNAV/VNAV DA	1436-1¼ 321 (400-1¼)				
LNAV MDA	1480-1 365 (400-1)			1480-1¼ 365 (400-1¼)	
CIRCLING	1540-1 421 (500-1)	1580-1 461 (500-1)	1820-2 701 (800-2)	1980-2¾ 861 (900-2¾)	
THIEF RIVER FALLS, MINNESOTA Orig-B 23APR20					
THIEF RIVER FALLS RGNL (TVF) RNAV (GPS) RWY 13					

HIRL Rwy 13-31 1

MIRL Rwy 4-22 1

REIL Rws 4, 13 and 22 1