


WAAS CH 69630 W05A	APP CRS 050°	Rwy Idg TDZE 3427 Apt Elev 3443
--	------------------------	---

RNAV (GPS) RWY 5

SHELBY (SBX)

RNP APCH - GPS.	MISSED APPROACH: Climb to 9000 direct YENUP and hold, continue climb-in-hold to 9000.
Baro-VNAV and VDP NA when using Cut Bank altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Cut Bank altimeter setting.	

AWOS-3PT 128.325	SALT LAKE CITY CENTER 133.4 285.4	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

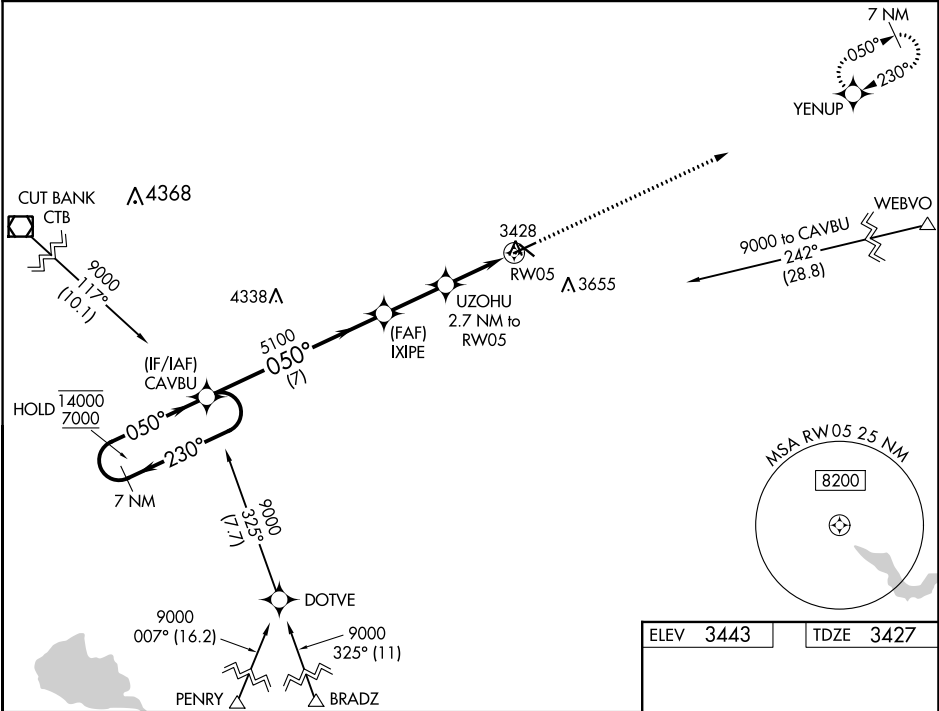

7 NM Holding Pattern		CAVBU		IXIPE		UZOHU 2.7 NM to RW05		1.1 NM to RW05		RW05		9000		YENUP	
14000 ← 230°		7000 → 050°		050°		5100		4300		5100					
GP 3.00° TCH 45				7 NM		2.4 NM		1.6 NM		1.1 NM					
CATEGORY		A		B		C		D							
LPV DA				3733-1		306 (300-1)									
LNAV/VNAV DA				3783-1		356 (400-1)									
LNAV MDA				3800-1		373 (400-1)									
CIRCLING		4020-1 577 (600-1)		4080-1 637 (700-1)		4100-1¾ 657 (700-1¼)		4220-2½ 777 (800-2½)							