

WAAS
CH **53599**
W36A

APP CRS
002°

Rwy Idg **7000**
TDZE **922**
Apt Elev **922**

RNAV (GPS) RWY 36

INDIANAPOLIS EXEC (TYQ)

RNP APCH - GPS.


▼

▲

Rwy 36 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct SICLE and hold.

AWOS-3PT 120.725	INDIANAPOLIS APP CON 124.65 127.15 317.8	CLNC DEL 118.175	UNICOM 123.05 (CTAF)
----------------------------	--	----------------------------	--------------------------------

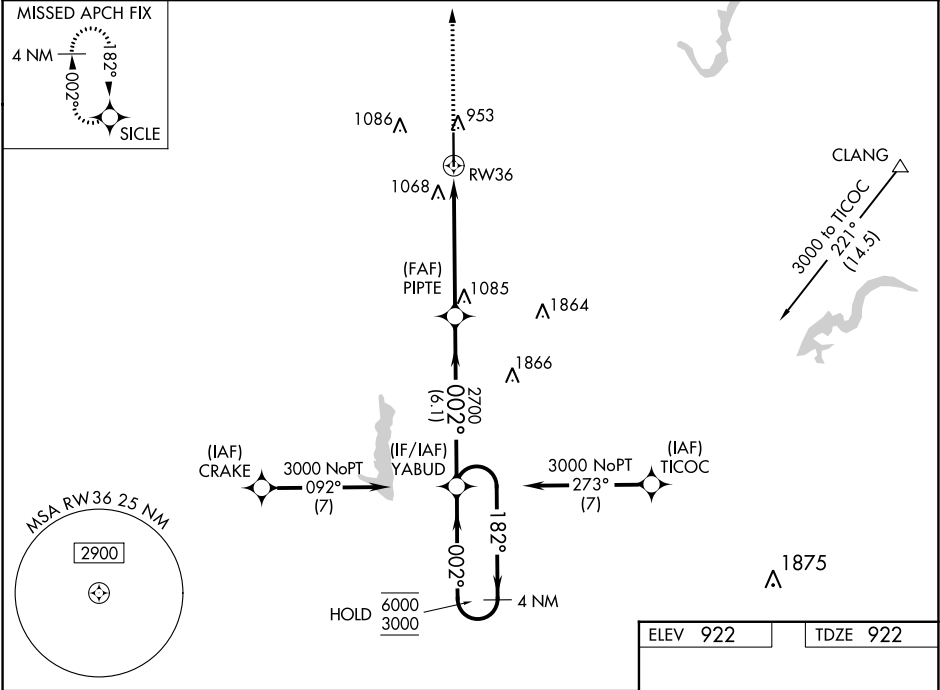

3000

SICLE

PIPTE

YABUD

4 NM Holding Pattern

182°

002°

6000

3000

GP 3.00°

TCH 53

1.3 NM to RW36

RW36

2700

002°

2700

1.3

4.1 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	1199-7⁄8 277 (300-7⁄8)			
LNAV/ VNAV DA	1351-1¼ 429 (500-1¼)			
LNAV MDA	1400-1	478 (500-1)	1400-1¾	478 (500-1¾)
CIRCLING	1400-1	478 (500-1)	1440-1½ 518 (600-1½)	1480-2 558 (600-2)

HIRL Rwy 18-36

REIL Rwy 18 and 36

81

7000 X 100

36

002°