

WAAS CH 86502 W11A	APP CRS 107°	Rwy Idg TDZE 145 Apt Elev 146	4001
--	------------------------	---	-------------

RNAV (GPS) RWY 11

WINTER HAVEN RGNL (GIF')


RNP APCH-GPS.

▼

Rwy 11 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA when using Bartow altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 54°C. When local altimeter setting not received, use Bartow altimeter setting and increase LPV DA to 415 feet; increase LNAV/VNAV DA to 667 feet and all visibilities ½ SM; increase all MDAs 20 feet. Straight-in Rwy 11 NA at night, Circling Rwy 5, 11, 29 NA at night.

MISSED APPROACH:
Climb to 2600 direct RAVYO and hold.

ASOS 133.675	TAMPA APP CON 120.65 290.3	CLNC DEL (GCO) 121.725	UNICOM 123.05 (CTAF) 0
------------------------	--------------------------------------	----------------------------------	----------------------------------

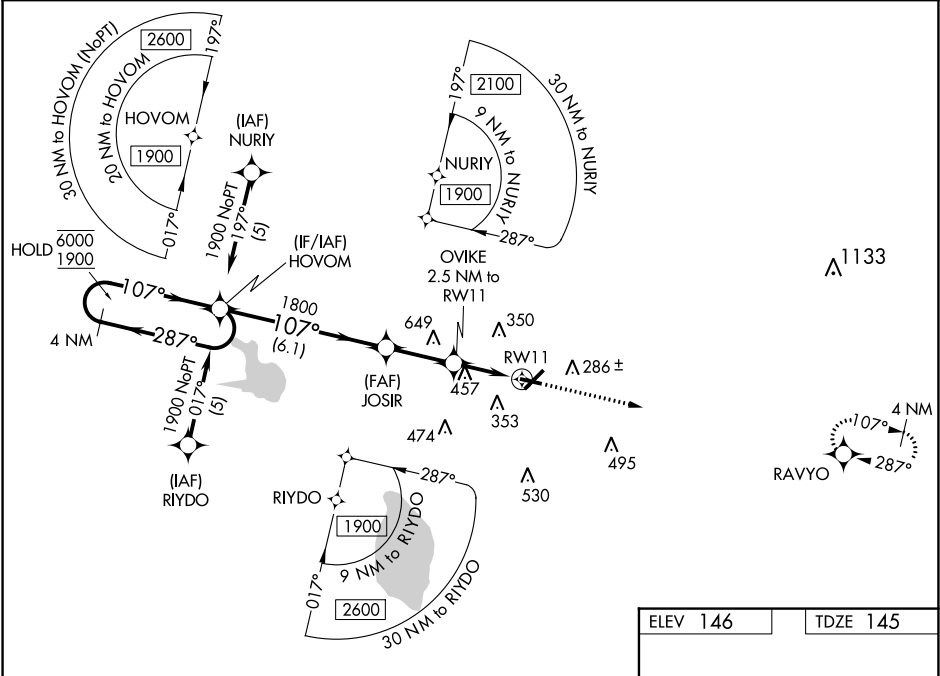

4 NM Holding Pattern HOVOM GP 3.00° TCH 45 6000 ← 287° 1900 → 107° 1800 980 2600 RAVYO					2600 RAVYO																			
JOSIR 1800 OVIKE 2.5 NM to RW11 RW11 107° 1800 980 2600 RAVYO					2600 RAVYO																			
6.1 NM 2.5 NM 2.5 NM 2600 RAVYO					2600 RAVYO																			
CATEGORY					A					B					C					D				
LPV DA					395-1					250 (300-1)														
LNAV/VNAV DA					647-1⅜					502 (600-1⅜)														
LNAV MDA					760-1 615 (700-1)					760-1¾ 615 (700-1¾)														
CIRCLING					760-1 614 (700-1)					820-2 674 (700-2)					960-2¾ 814 (900-2¾)									
REIL Rwys 5 and 23 REIL Rwys 11 and 29 MIRL Rwy 5-23 and 11-29																								