

WAAS CH 93818 W17A	APP CRS 174°	Rwy Idg TDZE 657 Apt Elev 657	5000 657 657
--	------------------------	---	---


RNAV (GPS) RWY 17
CHESTER CATAWBA RGNL (DCM)

RNP APCH-GPS.

⚠ Circling for Rwy 5-23 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Visibility reduction by helicopters NA. When local altimeter setting not received, use Rock Hill altimeter setting and increase all DA 33 feet and all MDA 40 feet and LNAV Cat D visibility ¼ mile. Baro-VNAV and VDP NA when using Rock Hill altimeter setting.

⚠ MISSED APPROACH: Climb to 3000 direct HUSNY and hold.

AWOS-3 120.975	CHARLOTTE APP CON 120.05 307.8	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

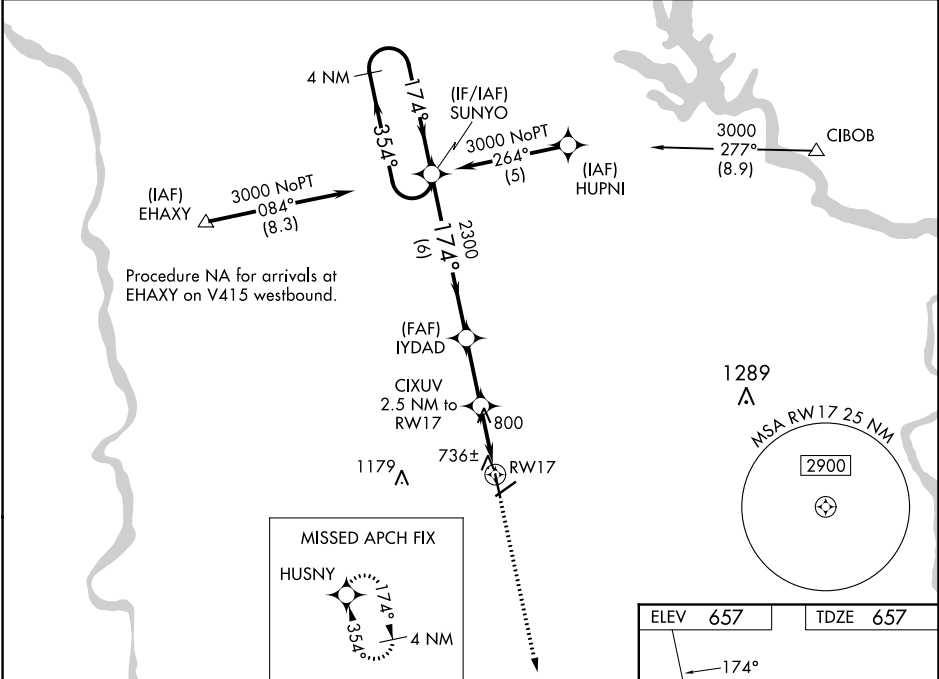

4 NM Holding Pattern SUNYO 3000 ← 354° 174° → GP 3.00° TCH 34					VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26). IYDAD 2300 CIXUV 2.5 NM to RW17 *1.1 NM to RW17 *1.4 NM to RW17 *1480 6 NM 2.5 NM 1.4 NM 1.1					3000 ↑ HUSNY ✦ *LNAV only.	
CATEGORY		A		B		C		D			
LPV	DA	907-1 250 (300-1)									
LNAV/ VNAV	DA	1134-1¾ 477 (500-1¾)									
LNAV	MDA	1060-1 403 (500-1)				1060-1¼ 403 (500-1¼)					
CIRCLING		1160-1 503 (600-1)				1280-1¾ 623 (700-1¾)		1480-2¾ 823 (900-2¾)			