


WAAS CH 58109 W02A	APP CRS 021°	Rwy Idg TDZE 913 Apt Elev 913	7026
--	------------------------	---	-------------

RNAV (GPS) RWY 2
DE KALB TAYLOR MUNI (DKB)

▼ Baro-VNAV NA when using Aurora altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. VDP NA when using Aurora altimeter setting. When local altimeter setting not received, use Aurora altimeter setting and increase all DA 61 feet and all MDA 80 feet; increase all LPV and LNAV/VNAV visibilities, LNAV Cats C/D visibility, and Circling Cats C/D visibility ¼ mile. For inop MALSR, increase LPV all Cats visibility to 1.	MALSR 	MISSED APPROACH: Climb to 3000 direct JUDVI and via 057° track to YEARN and hold.
---	--	--

AWOS-3 119.075	CHICAGO APP CON 133.5 349.0	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

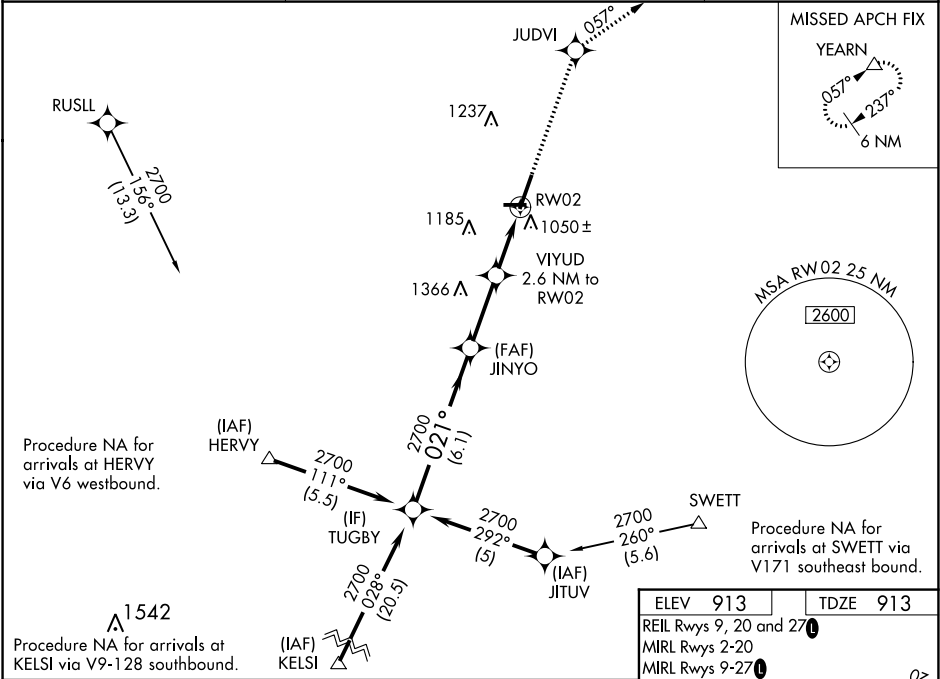

Procedure Turn NA				VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 53).		3000	JUDVI	tr	057°	YEARN
TUGBY				JINYO		*LNAV only.				
GP 3.00°				2700		*1800				
TCH 55				6.1 NM		2.8 NM				
CATEGORY				A		B				
LPV DA				1207-½		294 (300-½)				
LNAV/VNAV DA				1360-1		447 (500-1)				
LNAV MDA				1360-½		447 (500-½)				
CIRCLING				1360-1		1500-1				
				447 (500-1)		587 (600-1)				
						1600-2				
						687 (700-2)				
						1740-2¾				
						827 (900-2¾)				

