

APP CRS
095°

Rwy Idg **4498**
TDZE **161**
Apt Elev **160**

RNAV (GPS) RWY 9

WILSON INDUSTRIAL AIR CENTER (W03)


▼

NA

DME/DME RNP-0.3 NA. Procedure NA at night. Visibility reduction by helicopters NA. Obtain local altimeter setting on CTAF; when not received use Rocky Mount altimeter setting.

MISSED APPROACH: Climb to 2500 direct ROGCO then left turn via 002° track to FEBEL and hold.

WASHINGTON CENTER 123.85 279.65	UNICOM 123.0 (CTAF) 0
---	---------------------------------

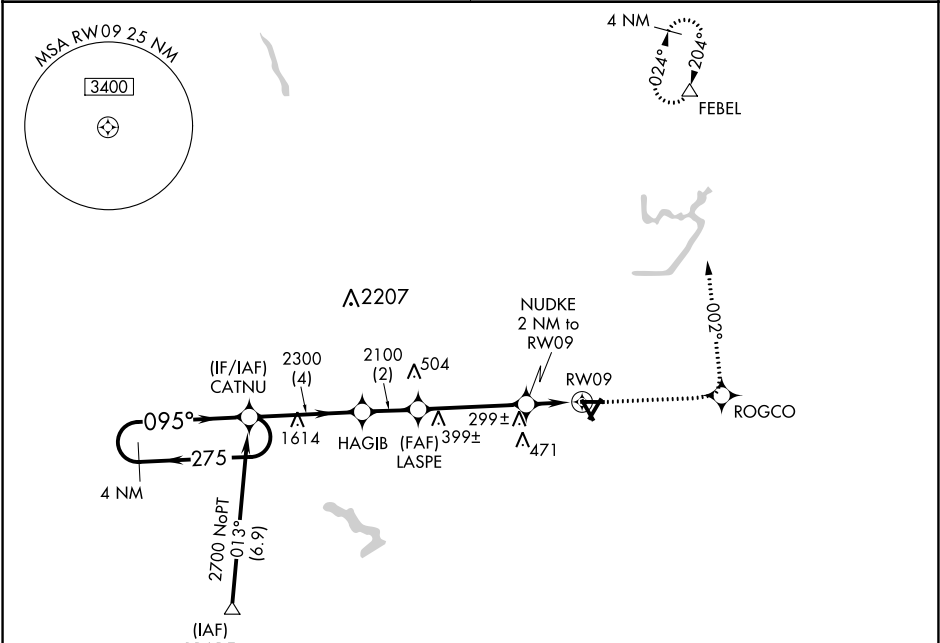

ELEV 160		TDZE 161	
4 NM Holding Pattern CATNU HAGIB LASPE NUDKE 2 NM to RW09 ROGCO FEBEL 2700 275° 095° 2300 2100 820 095° to RW09 4 NM 2 NM 3.9 NM 2 NM			
CATEGORY	A	B	D
LNAV MDA	560-1 399 (400-1)		560-1¼ 399 (400-1¼)
CIRCLING	660-1 500 (500-1)		780-1¾ 780-2 620 (700-1¾) 620 (700-2)
ROCKY MOUNT ALTIMETER SETTING MINIMUMS			
LNAV MDA	580-1 419 (500-1)		580-1¼ 419 (500-1¼)
CIRCLING	680-1 520 (600-1)		800-1¾ 800-2 640 (700-1¾) 640 (700-2)

095° to RW09

61

12

3

33

4498 X 150

4492 X 150

4500 X 150

27

1

2

REIL Rwy's 3 and 21

MIRL Rwy 3-21