

WAAS CH 42833 W20A	APP CRS 201°	Rwy Idg TDZE Apt Elev	6307 4970 4970
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 20

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Circling NA west of Rwy 2-20. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dalhart altimeter setting and increase all DA 227 feet and all MDA 240 feet, increase LPV all Cats visibility 7/8 mile, increase LNAV/VNAV all Cats visibility 3/4 mile, increase LNAV Cat C visibility 3/8 mile, and increase circling Cat C visibility 1/4 mile. Baro-VNAV and VDP NA when using Dalhart altimeter setting.

MISSED APPROACH: Climb to 8000 direct CACAV and hold, continue climb-in-hold to 8000.

ASOS 120.625	ALBUQUERQUE CENTER 127.85 285,475	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

Procedure NA for arrivals at ACAGU on V81 northwest bound.

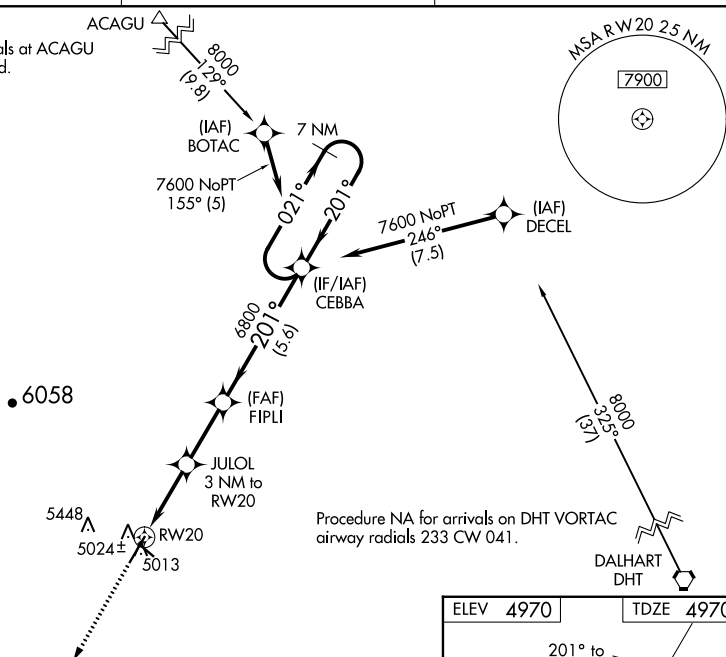

Procedure NA for arrivals on DHT VORTAC
airway radials 233 CW 041.

MISSED APCH FIX

8000	CACAV
	

* LNAV only.

*

RW20



10/10

CATEGORY

--	--

LPV	DA
-----	----

NAME	DATE
------	------

LNNAV/	DA
VNNAV	

VINAV

INAV MDA

END OF THE

 CIRCULINK

CIRCLING

CLAYTON M.

CLAYTON, R.

Amdt 2A 05

36°27'N-103°09'W

CLAYTON MUNI AIRPARK (CAO)
RNAV (GPS) RWY 20MIRI R_{WYS} 2-20 and 12-30