



APP CRS	Rwy Idg	3416
125°	TDZE	1924
	Apt Elev	1924

RNAV (GPS) RWY 12

NEW TOWN MUNI (Ø5D)

RNP APCH.	MISSED APPROACH: Climb to 4500 direct SUSUE and hold.
▼ ▲ NA	Use Stanley altimeter setting, when not received, use Tioga altimeter setting and increase all MDAs 40 feet. Increase Cat C visibilities ¼ SM. Rwy 12 helicopter visibility reduction below ¾ SM NA.

MINNEAPOLIS CENTER 127.6 279.6	CTAF 122.9 0
-----------------------------------	-----------------

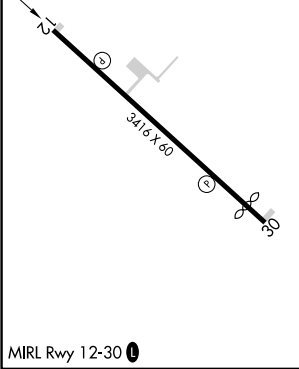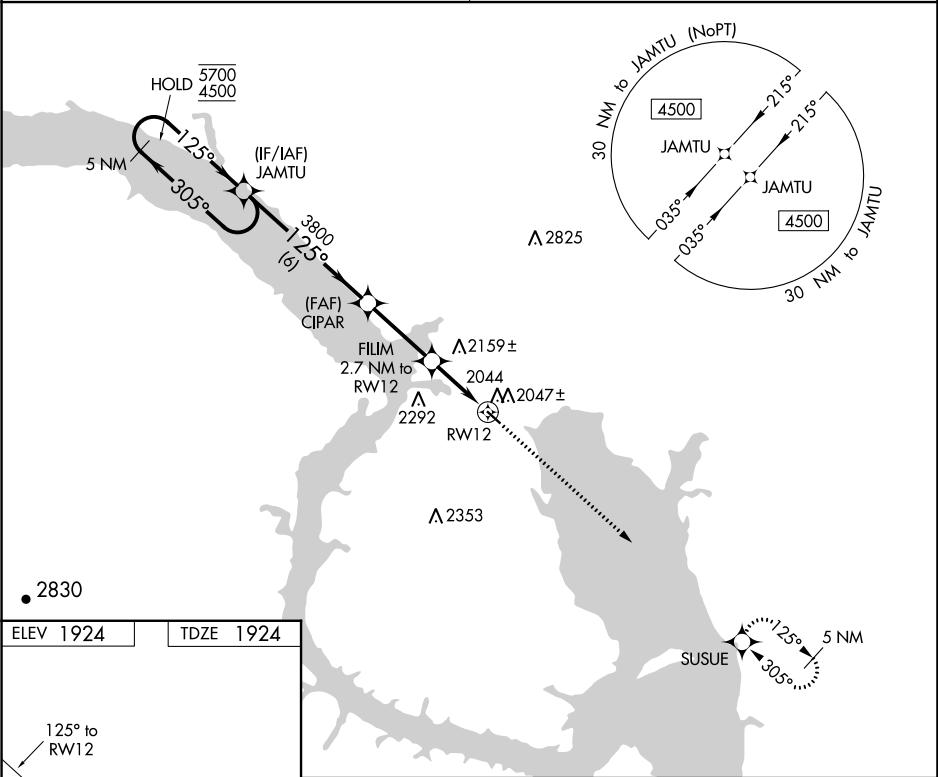

	JAMTU	CIPAR	FILM 2.7 NM to RW12	RW12
5 NM Holding Pattern	5700 4500	3800	2800	
	305°	125°	125°	
	125°	305°	305°	
	6 NM	3.1 NM	2.7 NM	
CATEGORY	A	B	C	D
LNAV MDA	2440-1	516 (600-1)	2440-1 3/8 516 (600-1 3/8)	NA
CIRCLING	2520-1 596 (600-1)	2620-1 696 (700-1)	2780-2 1/2 856 (900-2 1/2)	NA