

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>58118</b><br><b>W30A</b> | APP CRS<br><b>301°</b> | Rwy ldg<br>TDZE <b>493</b><br>Apt Elev <b>510</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 30R  
MEADOWS FLD (BFL)


**RNP APCH.**

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). Circling NA northeast of Rwy 12L-30R. When local altimeter setting not received, use Porterville altimeter setting: increase LPV DA to 790, LNAV/VNAV DA to 990. Increase LNAV/VNAV all Cats visibilities to 1 ¼ mile; increase all MDA 100 feet and LNAV visibility Cats C and D to RVR 5000. VDP and Baro-VNAV NA when using Porterville altimeter setting. For inop ALS when using Porterville altimeter setting, increase LPV all Cats visibility to RVR 5000 and LNAV Cat C and D visibility to 1%. # RVR 2400 when using Porterville altimeter setting.


**MALSR**

**MISSED APPROACH:**  
Climb to 1000 then climbing right turn to 3000 direct STEBN and hold.

|                      |                                                                              |                                                    |                         |                         |
|----------------------|------------------------------------------------------------------------------|----------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>118.6</b> | BAKERSFIELD APP CON ★<br><b>118.8 284.625 118.9 270.3</b><br>(SOUTH) (NORTH) | BAKERSFIELD TOWER ★<br><b>118.1 (CTAF) 0 257.8</b> | GND CON<br><b>121.7</b> | UNICOM<br><b>122.95</b> |
|----------------------|------------------------------------------------------------------------------|----------------------------------------------------|-------------------------|-------------------------|

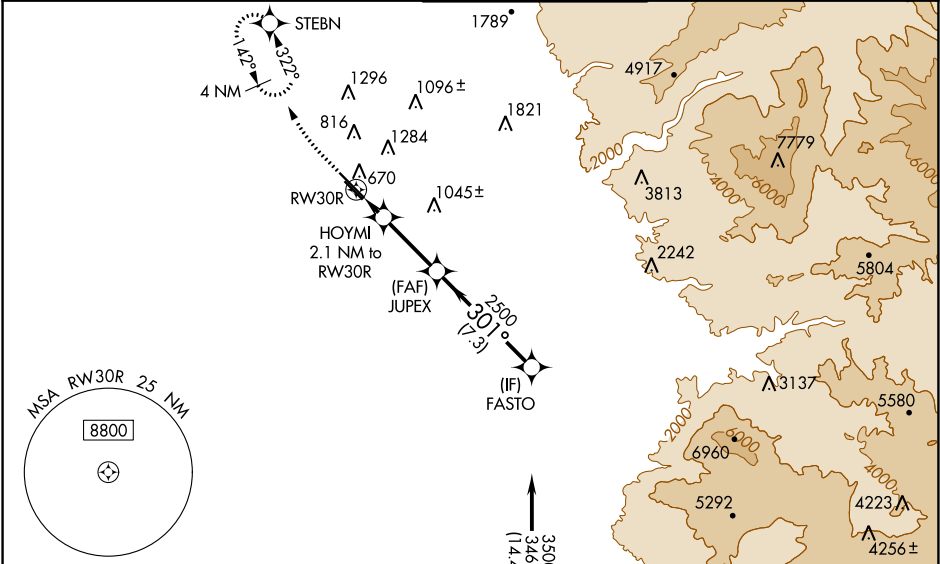

|                 |          |                 |
|-----------------|----------|-----------------|
| ELEV <b>510</b> | <b>D</b> | TDZE <b>493</b> |
|-----------------|----------|-----------------|

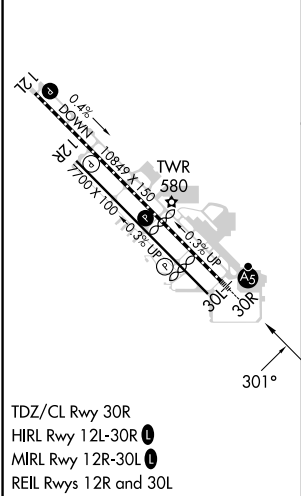

|              |        |             |                        |                       |
|--------------|--------|-------------|------------------------|-----------------------|
|              |        |             |                        |                       |
| 1000         | 3000   | STEBN       |                        |                       |
| *LNAV only   |        |             |                        |                       |
|              |        |             |                        |                       |
| CATEGORY     | A      | B           | C                      | D                     |
| LPV DA#      | 698/18 |             | 205 (200-½)            |                       |
| LNAV/VNAV DA | 898/45 |             | 405 (400-¾)            |                       |
| LNAV MDA     | 880/24 | 387 (400-½) | 880/35                 | 387 (400-¾)           |
| CIRCLING     | 960-1  | 450 (500-1) | 960-1½<br>450 (500-1½) | 1060-2<br>550 (600-2) |