

WAAS CH 48940 W13A	APP CRS 129°	Rwy Idg 5012 TDZE 54 Apt Elev 55
--	------------------------	---


RNAV (GPS) RWY 13
KNOX COUNTY RGNL (RKD)

⚠ DME/DME RNP -0.3 NA. VDP and Baro-VNAV NA when using Wiscasset allimeter setting. When local allimeter setting not received, use Wiscasset allimeter setting and increase LPV DA to 319 feet, LNAV/VNAV DA to 467 feet and all MDA 80 feet. Increase LNAV/VNAV all Cats to 1 SM, LNAV Cat C/D to 1 SM and Circling Cat C to 2 ¼ SM. For inop ALS increase LNAV/VNAV all Cats visibility to 1 ½ SM. For inop ALS when using Wiscasset allimeter setting increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats visibility to 1 ½ SM and LNAV Cat C/D to 1 ½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).



MISSED APPROACH:
Climb to 800 then
climbing right turn to
2400 direct AVMAW
and hold.

AWOS-3PT 119.025	PORTLAND APP CON ★ 120.4 299.2	CLNC DEL 123.8	UNICOM 123.05 (CTAF) 0
----------------------------	--	--------------------------	----------------------------------

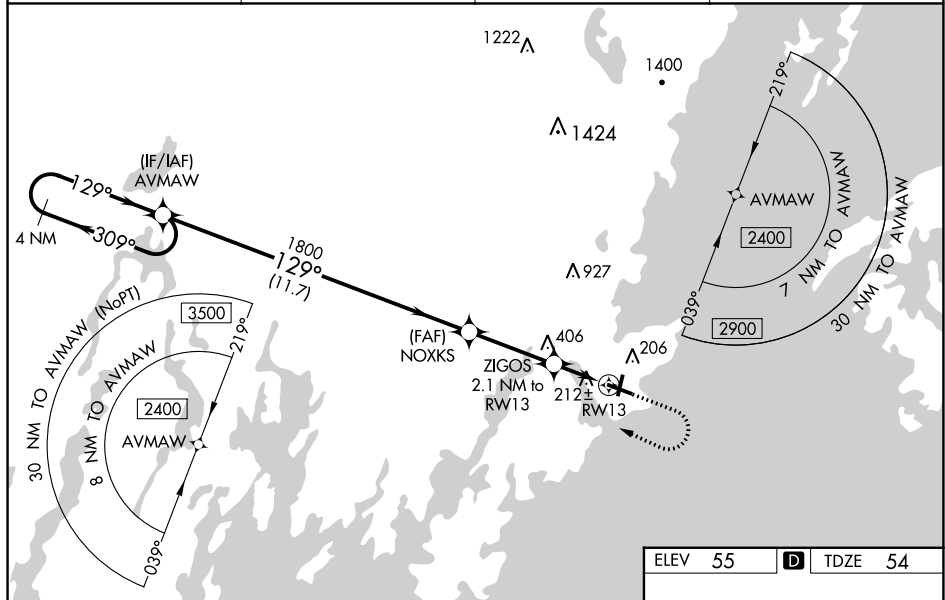

NE-1, 18 APR 2024 to 16 MAY 2024

ZIGOS VORTAC

4 NM Holding Pattern AVMAW
NOXKS 1800
ZIGOS 2.1 NM to RW13
RW13
GP 3.00° TCH 51'
*LNAV only

CATEGORY	A	B	C	D
LPV DA	254- $\frac{1}{2}$	200 (200- $\frac{1}{2}$)		
LNAV/VNAV DA	402- $\frac{3}{4}$	348 (400- $\frac{3}{4}$)		
LNAV MDA	480- $\frac{1}{2}$ 426 (500- $\frac{1}{2}$)	480- $\frac{3}{4}$ 426 (500- $\frac{3}{4}$)		
C CIRCLING	580-1 525 (600-1)	720- $\frac{13}{4}$ 665 (700- $\frac{13}{4}$)	1140-3 1085 (1100-3)	

REIL Rwy 3 and 31
MIRL Rwy 3-21
HIRL Rwy 13-31

ROCKLAND, MAINE
Orig 22JUN17

44°04'N-69°06'W

KNOX COUNTY RGNL (RKD)
RNAV (GPS) RWY 13