

WAAS CH 86608 W35A	APP CRS 345°	Rwy Idg 5002 TDZE 610 Apt Elev 610
--	------------------------	---

RNAV (GPS) RWY 35
ROBERT SIBLEY (SZY)


RNP-APCH - GPS

NA Baro-VNAV NA when using Mc Kellar-Sipes Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Helicopter visibility reduction below 1 SM not authorized. When local altimeter setting not received, use Mc Kellar-Sipes Rgnl altimeter setting: increase LPV DA to 1042 and all visibilities ¼ SM, increase LNAV/VNAV DA to 1084 and all visibilities ½ SM; increase all MDAs 100 feet and LNAV visibility Cat C and D and Circling visibility Cat D ½ SM. Straight-in Rwy 35 NA at night. Circling Rwy 17, 35 NA at night.

MISSED APPROACH:
Climb to 2600 direct
YIPUB and hold.

AWOS-3 118,425	MEMPHIS CENTER 124.35 318.1	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

MISSED APCH FIX

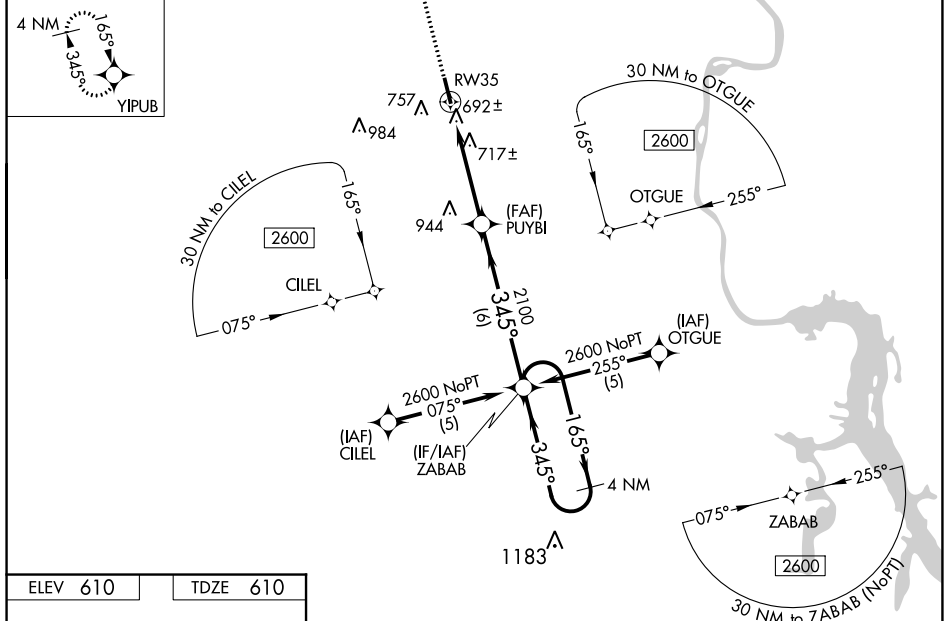

ELEV 610		TDZE 610
----------	--	----------

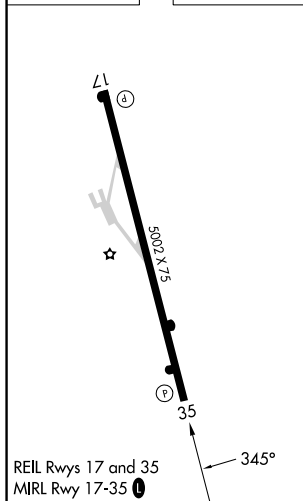


Diagram illustrating the 4 NM Holding Pattern for RW35. The pattern is a series of turns around a fix (PUBYI). The inbound leg is 2100 feet, and the outbound leg is 4.5 NM. The pattern is a 345° turn followed by a 165° turn. The diagram also shows the VGSi and RNAV glidepath not coincident (VGSi Angle 4.00°/TCH 29).