


WAAS CH 93936 W16A	APP CRS 160°	Rwy Idg TDZE 1257 Apt Elev 1266	5000 1257 1266
--	------------------------	---	---

RNAV (GPS) RWY 16
GWINNER-ROGER MELROE FIELD (GWR)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 47°C (117°F). DME/DME RNP-0.3 NA. Circling NA to Rwy's 6 and 24. Baro-VNAV and VDP NA when using Fargo altimeter setting. When local altimeter setting not received, use Fargo altimeter setting: increase LPV DA to 1683 feet and visibility ¾ SM, and LNAV/VNAV DA to 1803 feet and visibility ¾ SM; increase all MDAs 180 feet and visibility LNAV Cat C/D ¾ SM, and Circling Cat C ¾ SM, and Circling Cat D ½ SM.

MISSED APPROACH:
Climb to 3500 direct
WASWK and hold.

AWOS-3 118.325	MINNEAPOLIS CENTER 127.35 278.3	UNICOM 122.7 (CTAF) 0
--------------------------	---	--

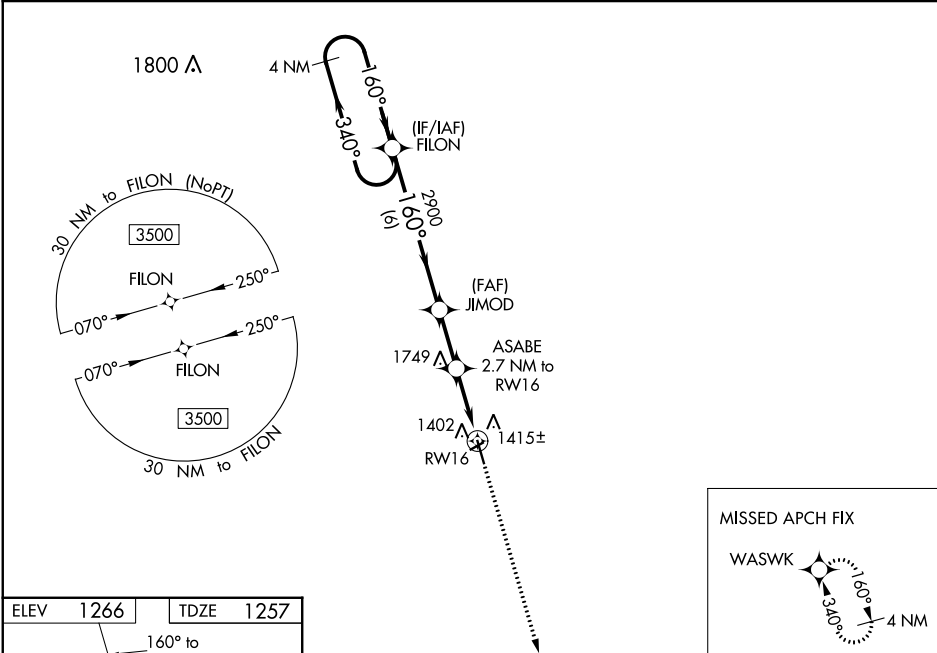

ELEV 1266	TDZE 1257
------------------	------------------

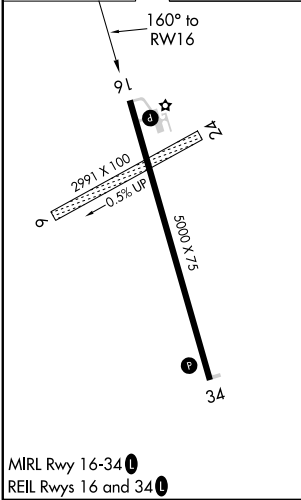

4 NM Holding Pattern		FILON		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 25).		3500 ↑		WASWK ✦	
3500 ← 340° 160° →				JIMOD 2900		ASABE 2.7 NM to RW16		*LNAV only.	
GP 3.10° TCH 40				2900 ↗		*2180		*1.2 NM to RW16	
		6 NM		2.2 NM		1.5 NM		1.2 NM	
CATEGORY		A		B		C		D	
LPV DA				1507-1		250 (300-1)			
LNAV/ VNAV DA				1627-1¼		370 (400-1¼)			
LNAV MDA		1660-1		403 (400-1)		1660-1½		403 (400-1½)	
C CIRCLING		1780-1		514 (600-1)		1840-1½ 574 (600-1½)		2060-2½ 794 (800-2½)	