

RNP APCH.


T

A

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct CABBY and hold.

AWOS-3 119.575	REGIONAL APP CON 125.2 343.65	UNICOM 122.975 (CTAF) 0
-------------------	----------------------------------	----------------------------

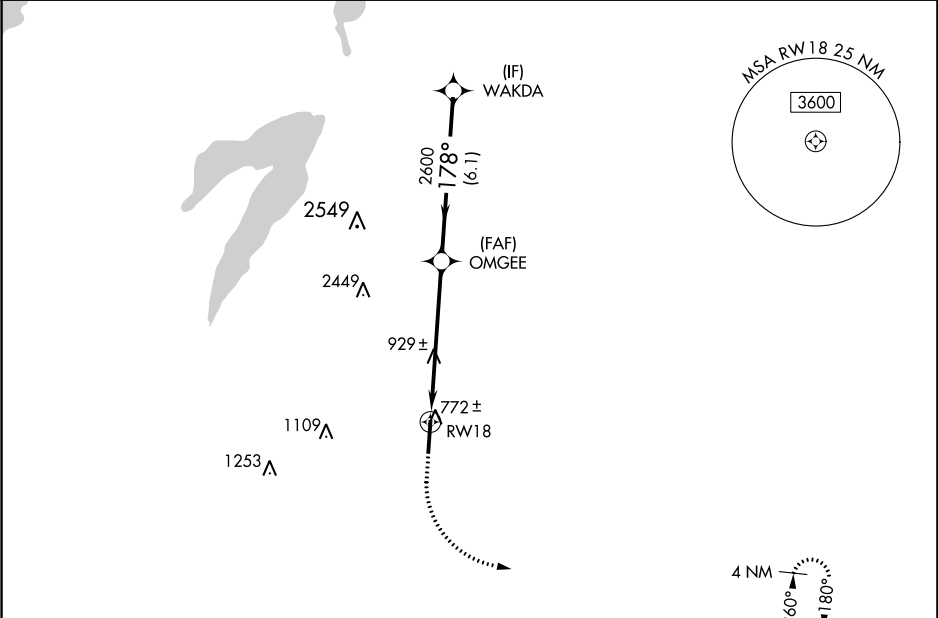

ELEV 727

TDZE 727

178° to RW18

81

001 X 0055

65

0.6 % UP

36

MIRL Rwy 18-36 0

REIL Rwy 18 0

1300

3000

CABBY

*LNAV only.

RW18

OMGEE

WAKDA

3000

2600

2600

178°

GP 3.00°

TCH 40

1.4 NM

4.3 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	927-3/4 200 (200-3/4)			
LNAV/VNAV DA	998-7/8 271 (300-7/8)			
LNAV MDA	1220-1	493 (500-1)	1220-13/8	493 (500-13/8)
CIRCLING	1220-1	493 (500-1)	1300-11/2	1420-21/4
			573 (600-11/2)	693 (700-21/4)