

|                      |                        |                  |              |
|----------------------|------------------------|------------------|--------------|
| LOM SH<br><b>375</b> | APP CRS<br><b>047°</b> | Rwy Idg<br>6002  | TDZE<br>1184 |
|                      |                        | Apt Elev<br>1201 |              |

AL-5369 (FAA)

# NDB RWY 5


SHENANDOAH VALLEY RGNL (SHD)

When local altimeter setting not received, use Charlottesville altimeter setting: increase all MDAs 140 feet and visibility S-5 and Circling Cat C/D ½ mile.





MISSED APPROACH: Climb to 2400 then climbing left turn to 3600 direct SH LOM and hold.

|                          |  |                           |                                 |
|--------------------------|--|---------------------------|---------------------------------|
| AWOS-3<br><b>124.925</b> | POTOMAC APP CON<br><b>132.85 323.125</b> | CLNC DEL<br><b>118.35</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|--------------------------|--|---------------------------|---------------------------------|

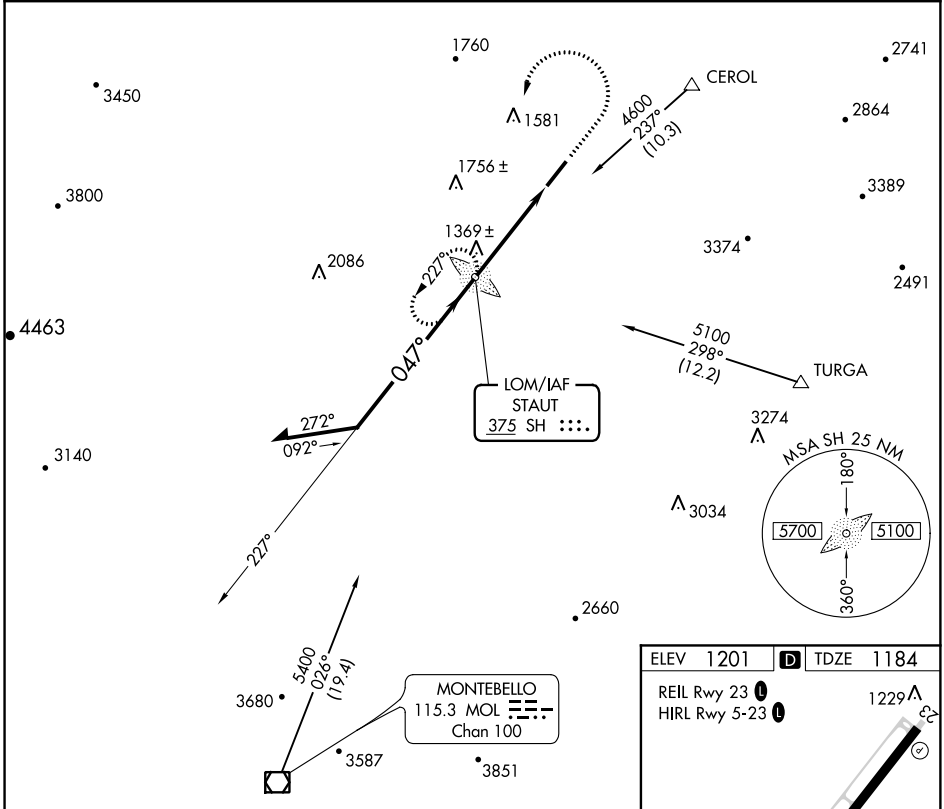

NE-3, 25 MAY 2017 to 22 JUN 2017

NE-3, 25 MAY 2017 to 22 JUN 2017

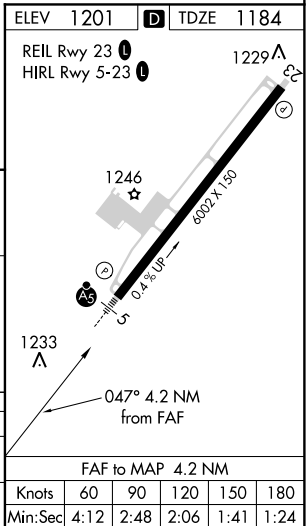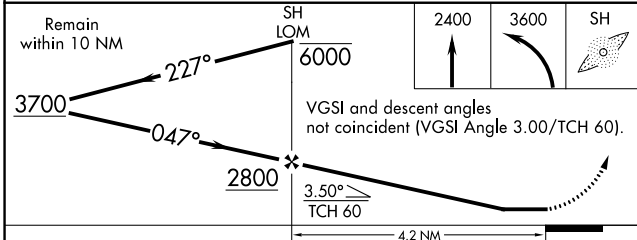

|          |        |  |             |  |              |  |             |  |
|----------|--------|--|-------------|--|--------------|--|-------------|--|
| CATEGORY | A      |  | B           |  | C            |  | D           |  |
|          | 1760-¾ |  | 576 (600-¾) |  | 1760-1       |  | 1760-1½     |  |
| S-5      | 1760-¾ |  | 576 (600-¾) |  | 1760-1       |  | 1760-1½     |  |
| CIRCLING | 1760-1 |  | 559 (600-1) |  | 1760-1½      |  | 1820-2      |  |
|          |        |  |             |  | 559 (600-1½) |  | 619 (700-2) |  |

|                   |      |      |      |      |      |
|-------------------|------|------|------|------|------|
| FAF to MAP 4.2 NM |      |      |      |      |      |
| Knots             | 60   | 90   | 120  | 150  | 180  |
| Min:Sec           | 4:12 | 2:48 | 2:06 | 1:41 | 1:24 |