

LOM FO 326	APP CRS 132°	Rwy ldg 12803 TDZE 1065 Apt Elev 1078
----------------------	------------------------	--


NDB RWY 13

TOPEKA RGNL (F/OE)



▼ When local altimeter setting not received, use Philip Billard Muni altimeter setting increase all MDA 60 feet and increase all S-13 and Circling Cats C and D visibility ¼ mile. For inoperative SALS, increase S-13 Cat D visibility ¼ mile; ZAGLU fix minimums: Increase S-13 Cats C/D visibility ½ mile. For inoperative SALS, when using Philip Billard Muni altimeter setting, increase S-13 Cats C/D visibility ¾ mile; ZAGLU fix minimums: Increase S-13 Cats C/D visibility ¾ mile.

MISSED APPROACH: Climb to 3700 direct RPLY LOM and hold, continue climb-in-hold to 3700.

ATIS 128.25	KANSAS CITY CENTER 123.8 343.7	FORBES TOWER* 120.8 (CTAF) 340.2	GND CON 121.7 275.8	UNICOM 122.95
-----------------------	--	---	-------------------------------	-------------------------

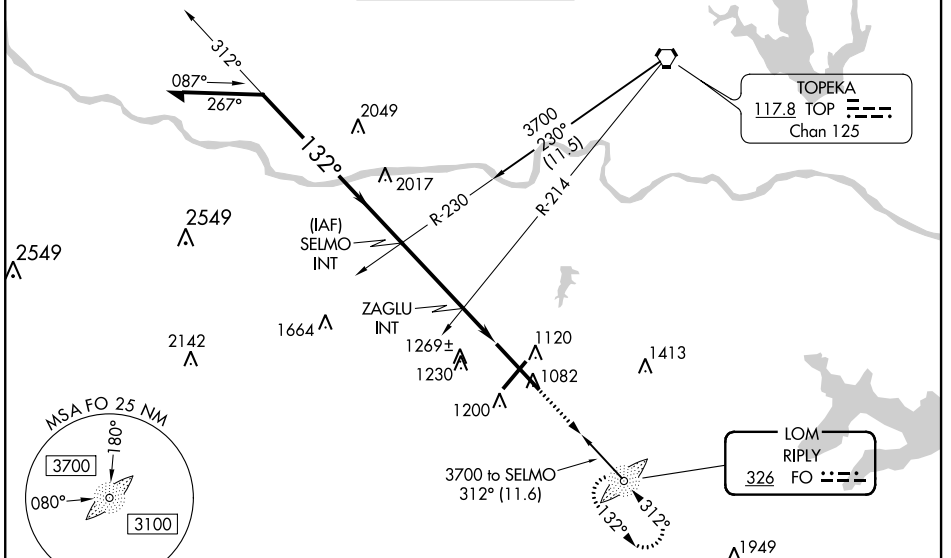

ELEV 1078	D TDZE 1065
-----------	--------------------

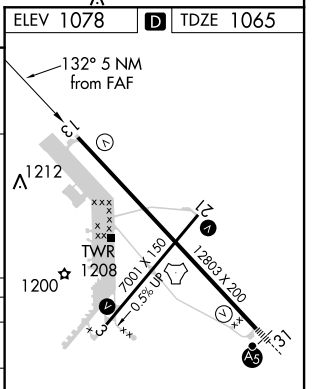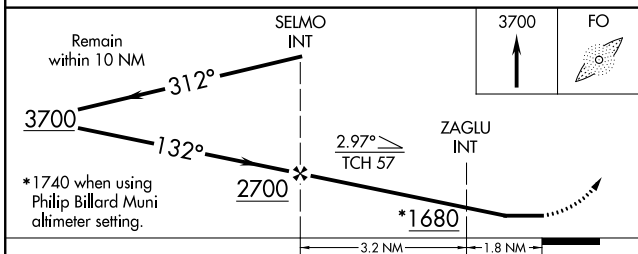

CATEGORY	A	B	C	D
S-13	1680-¾	615 (700-¾)	1680-1½	615 (700-1½)
C CIRCLING	1680-1	602 (700-1)	1680-1¾	1700-2 602 (700-1¾)
ZAGLU FIX MINIMUMS				
S-13	1580-¾	515 (600-¾)	1580-1½	515 (600-1½)
C CIRCLING	1580-1	502 (600-1)	1580-1½	1700-2 622 (700-2)

REIL Rwys 3, 13 and 21
MIRL Rwy 3-21
HIRL Rwy 13-31

FAF to MAP 5 NM

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

NC-2, 20 JUL 2017 to 17 AUG 2017

NC-2, 20 JUL 2017 to 17 AUG 2017