APP CRS	Rwy Idg	8394
276°	TDZE	7
	Apt Elev	9

RNAV (RNP) Z RWY 28R

FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

For uncompensated Baro-VNAV systems, procedure NA below 5°C (40°F) or above 54°C (130°F).
GPS Required.
Inop table does not apply.

MALSR

MISSED APPROACH: Climb to 4000 on track 276° to PIONN and hold, continue climb-in-hold to 4000.

D-ATIS	MIAMI APP CON	FORT LAUDERDALE TOWER	GND CON	CLNC DEL	CPDLC
135.0	133.775 285.6	119.3 257.8	121.4	128.4	

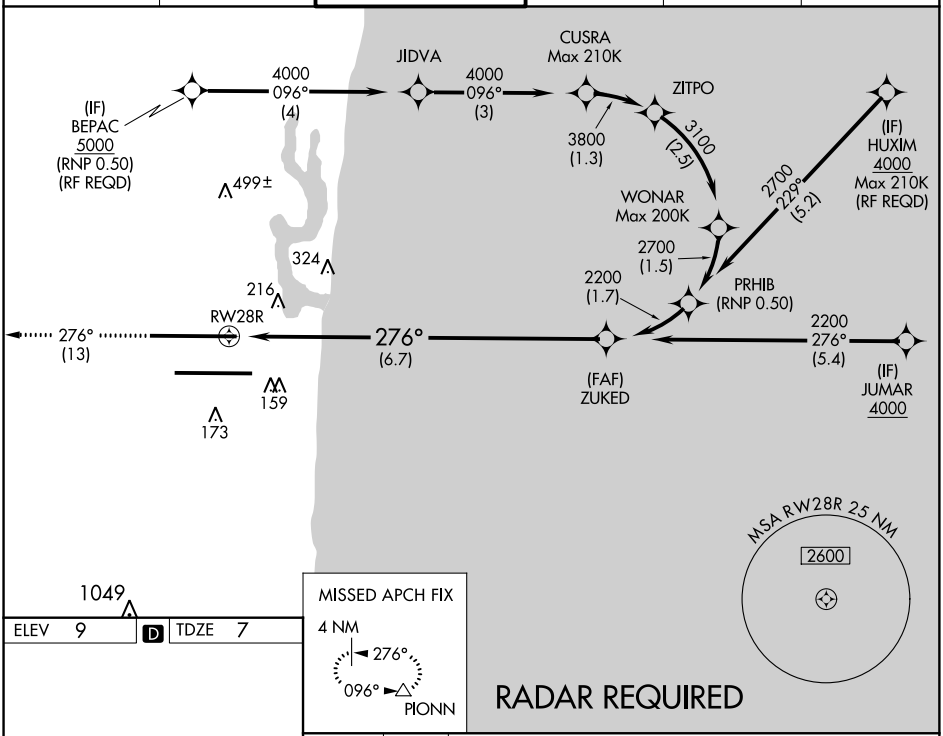

1049

ELEV 9	D	TDZE 7

MISSED APCH FIX
4 NM
276°
096°
PIONN

RADAR REQUIRED



4000 tr 276°	PIONN	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).

See planview for multiple IF locations.

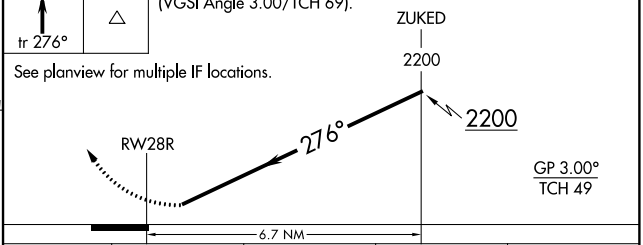

CATEGORY	A	B	C	D
RNP 0.15 DA	405-1⅜	398 (400-1⅜)		
RNP 0.30 DA	627-1⅝	620 (700-1⅜)		

HIRL Rwy 10L-28R

AUTHORIZATION REQUIRED

SE-3, 14 SEP 2017 to 12 OCT 2017
SE-3, 14 SEP 2017 to 12 OCT 2017