WAAS	APP CRS	Rwy Idg	6002
CH 78113	227°	TDZE	1201
W23A		Apt Elev	1201

AL-5369 (FAA)

RNAV (GPS) RWY 23

SHENANDOAH VALLEY RGNL (SHD)

Baro-VNAV NA when using Charlottesville altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Charlottesville altimeter setting and increase all DA 130 feet, all MDA 140 feet. Increase LPV and LNAV/VNAV all Cats visibility ¼ mile, LNAV Cat C visibility ¼ mile and LNAV Cat D and Circling Cat D visibility ½ mile.

-23°C/-9°F

MISSED APPROACH: Climb to 5300 direct GABEL and hold, continue climb-in-hold to 5300.

AWOS-3	POTOMAC APP CON	CLNC DEL	UNICOM
124.925	132.85 323.125	118.35	123.0 (CTAF) L

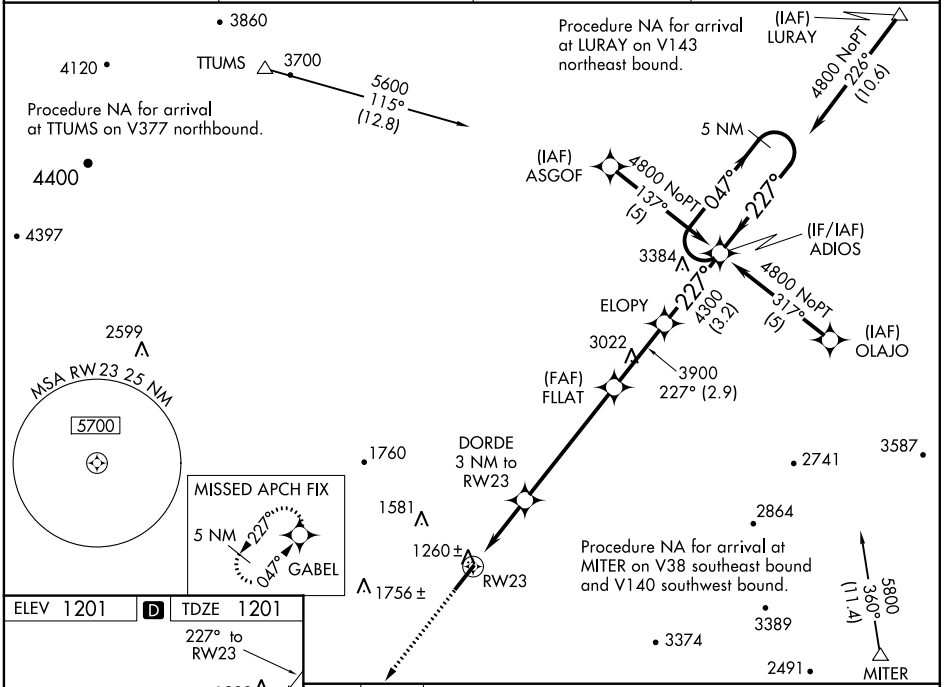

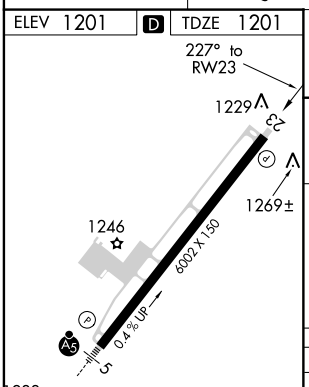

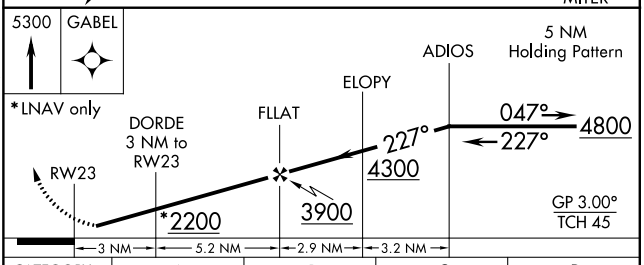

CATEGORY	A	B	C	D
LPV DA	1451-1 250 (300-1)			
LNAV/VNAV DA	1530-1¼ 329 (400-1¼)			
LNAV MDA	1520-1 319 (400-1)			
CIRCLING	1600-1 399 (400-1)	1660-1 459 (500-1)	1660-1½ 459 (500-1½)	1820-2 619 (700-2)

REIL Rwy 23 L
HIRL Rwy 5-23 L

NE-3, 07 DEC 2017 to 04 JAN 2018
NE-3, 07 DEC 2017 to 04 JAN 2018