APP CRS	Rwy Idg	11259
071°	TDZE	128
	Apt Elev	128

RNAV (RNP) Z RWY 7L

LOS ANGELES INTL (LAX)

For uncompensated Baro-VNAV systems, procedure NA below 5°C (41°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 5000 and RNP 0.30 all Cats visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 3000 on track 071° to FILBA and on track 072° to DOWNE and hold.

D-ATIS	SOCAL APP CON				LOS ANGELES TOWER	GND CON	CLNC DEL	CPDLC
ARR 133.8	124.3	363.2	124.9	269.0	N 133.9 239.3	N 121.65 327.0	120.35	
DEP 135.65	(APCH FM WEST)		(090°-224°)		S 120.95 379.1	S 121.75 327.0	327.0	
	124.5	235.975	128.5	360.7		W 121.4 327.0		
	(225°-044°)		(045°-089°)					

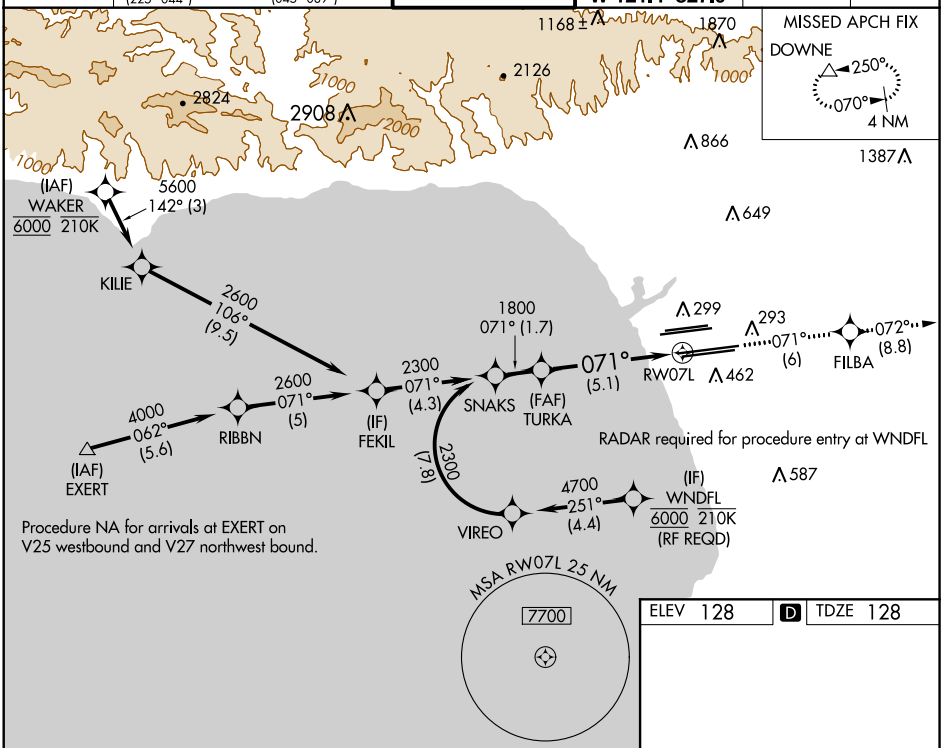

ELEV 128	D	TDZE 128

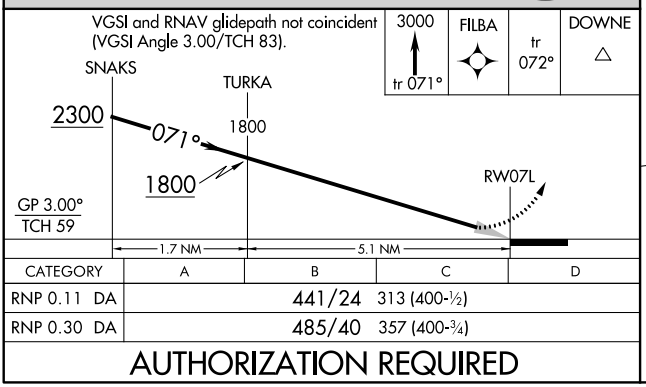

CATEGORY	A	B	C	D
RNP 0.11 DA	441/24	313 (400-½)		
RNP 0.30 DA	485/40	357 (400-¾)		

AUTHORIZATION REQUIRED



TDZ/CL Rwys 7L, 24R, and 25L
HIRL all Rwys

SW-3, 04 JAN 2018 to 01 FEB 2018
SW-3, 04 JAN 2018 to 01 FEB 2018