APP CRS	Rwy Idg	N/A
110°	TDZE	N/A
	Apt Elev	1003

RNAV (GPS)-C
WHITEMAN (WHP)

When control tower closed, use Burbank altimeter setting.
IAF ARM APPROACH MODE PRIOR TO IAF.
GPS or RNP-0.3 required. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climbing right turn to 4000 direct CANOG and hold.

ATIS	SOCAL APP CON	WHITEMAN TOWER ★	GND CON	UNICOM
132.1	134.2 338.2	135.0 (CTAF)	125.0	122.95

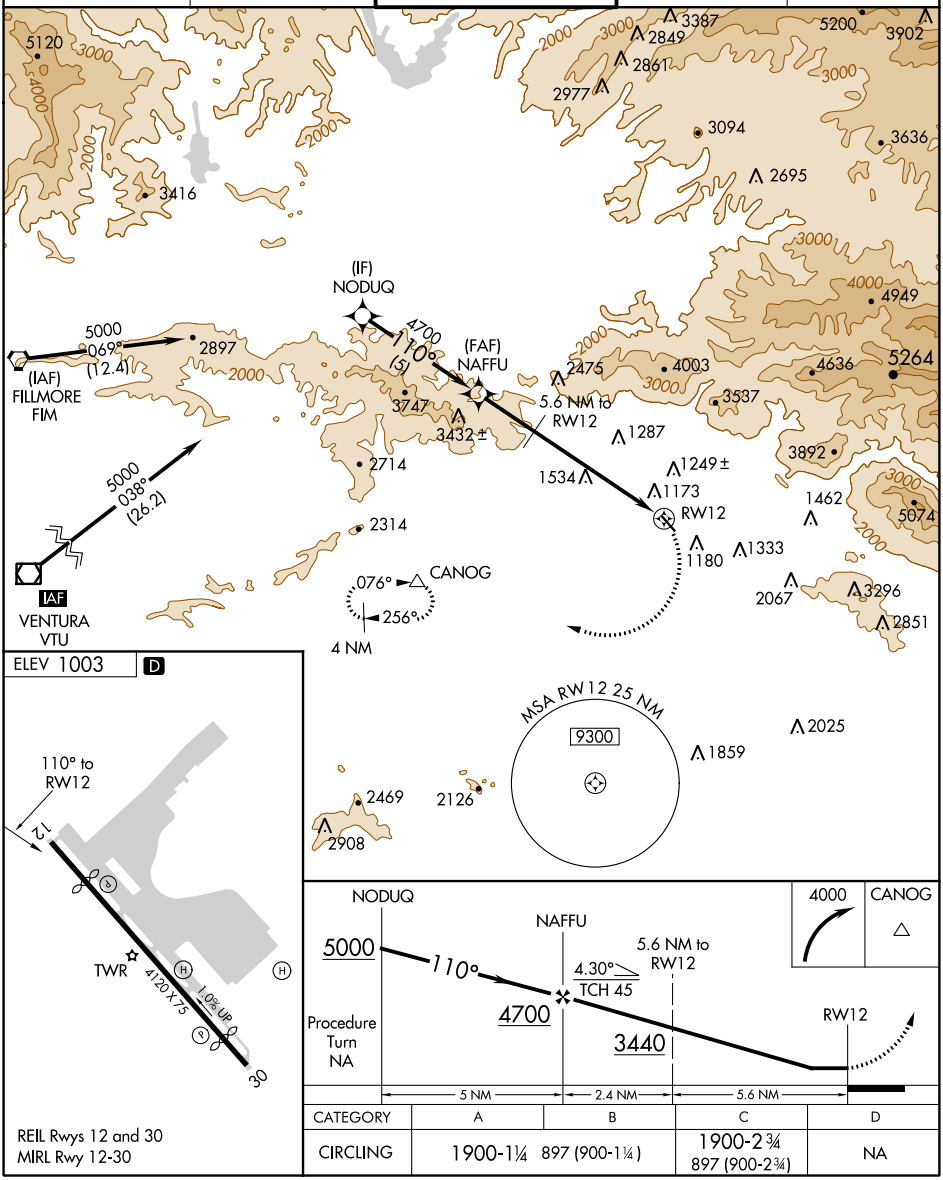

CATEGORY	A	B	C	D
CIRCLING	1900-1¼ 897 (900-1¼)		1900-2¾ 897 (900-2¾)	NA

SW-3, 04 JAN 2018 to 01 FEB 2018
SW-3, 04 JAN 2018 to 01 FEB 2018