


LOM SH 375	APP CRS 047°	Rwy Idg 6002	TDZE 1184
		Apt Elev 1201	

AL-5369 (FAA)

NDB RWY 5



SHENANDOAH VALLEY RGNL (SHD)

<p>When local altimeter setting not received, use Charlottesville altimeter setting: increase all MDAs 140 feet and visibility S-5 and Circling Cat C/D ½ mile.</p>	<p>MALS R</p>	<p>MISSED APPROACH: Climb to 2400 then climbing left turn to 3600 direct SH LOM and hold.</p>	
		AWOS-3 124.925	POTOMAC APP CON 132.85 323.125

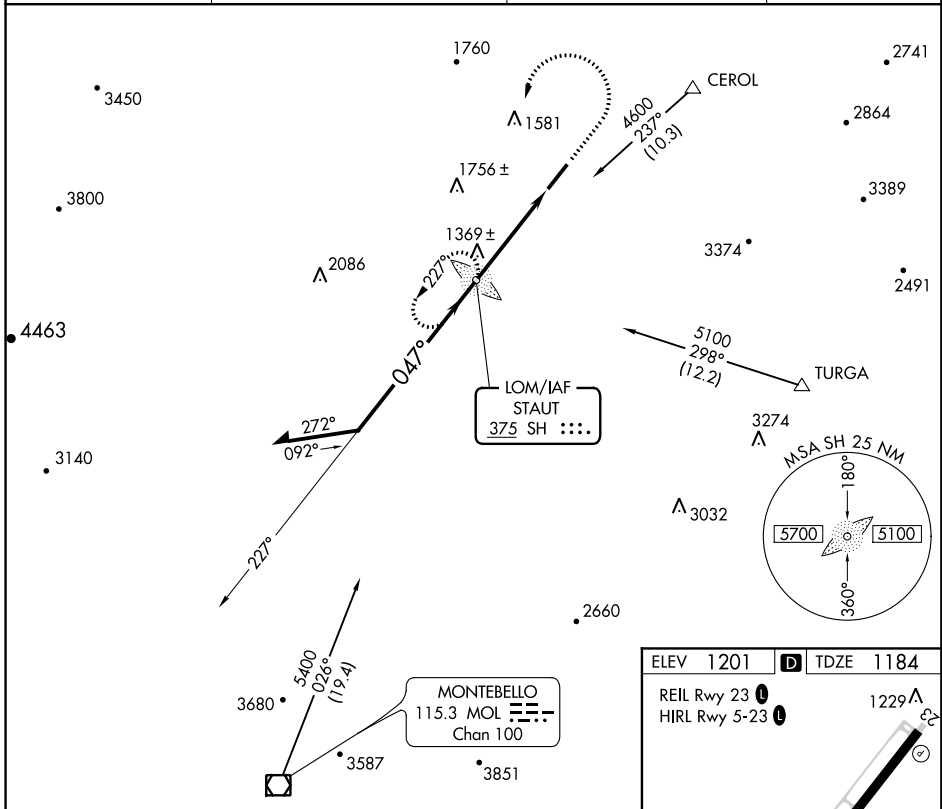

NE-3, 01 MAR 2018 to 29 MAR 2018

NE-3, 01 MAR 2018 to 29 MAR 2018

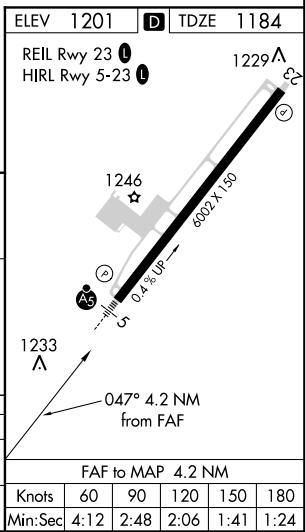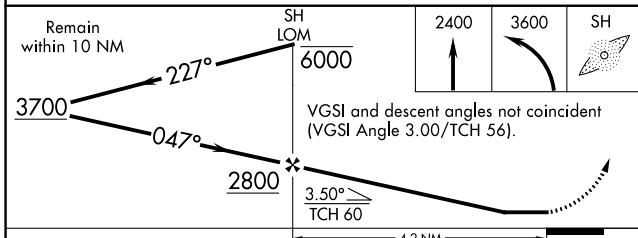

CATEGORY	A	B	C	D
S-5	1760-¾ 576 (600-¾)		1760-1 576 (600-1)	1760-1½ 576 (600-1½)
CIRCLING	1760-1 559 (600-1)		1760-1½ 559 (600-1½)	1820-2 619 (700-2)