

WAAS CH 61207 W06B	APP CRS 071°	Rwy Idg TDZE 116 Apt Elev 128	9748
--	------------------------	---	-------------

RNAV (GPS) Y RWY 6R


LOS ANGELES INTL (LAX)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C (41°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500, LNAV Cat C and D visibility to RVR 5500. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. # RVR 1800 authorized with use of FD or AP or HUD to DA.



MISSED APPROACH:
Climb to 3000 direct ZIMLO and track 042° to AMTRA and hold.

D-ATIS ARR 133.8 DEP 135.65	SOCAL APP CON 124.3 363.2 (APCH FM WEST) 124.5 235.975 (225°-044°)	124.9 269.0 (090°-224°) 128.5 360.7 (045°-089°)	LOS ANGELES TOWER N 133.9 239.3 S 120.95 379.1	GND CON N 121.65 327.0 S 121.75 327.0 W 121.4 327.0	CLNC DEL 120.35 327.0	CPDLC
---	--	--	--	---	---------------------------------	-------

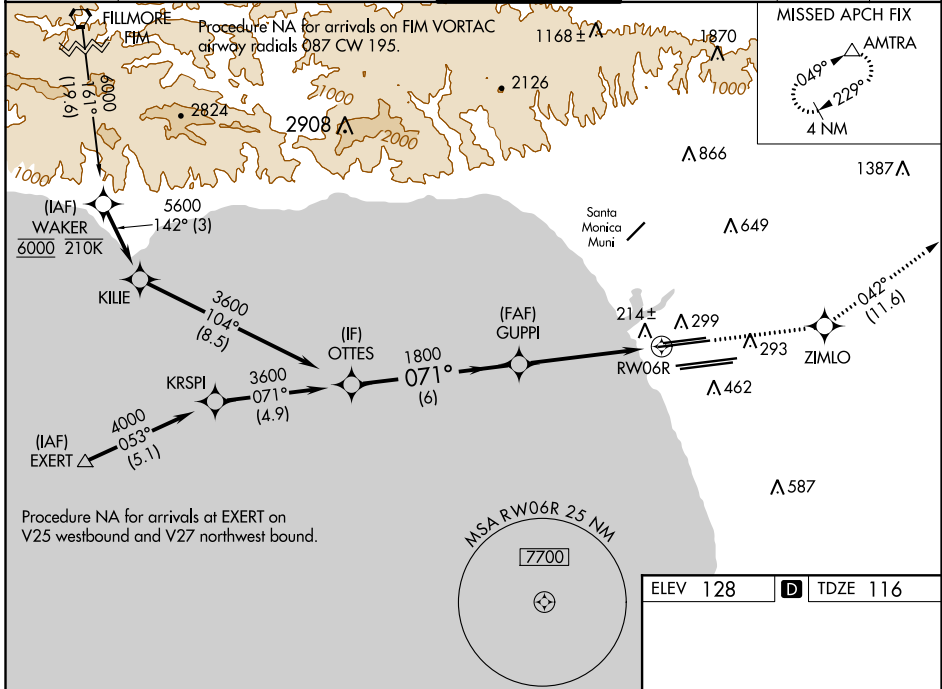

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 69).		3000	ZIMLO	tr 042°	AMTRA
<p>GP 3.00° TCH 53</p> <p>OTTES 3600</p> <p>GUPPI 1800</p> <p>071°</p> <p>1800</p> <p>6 NM</p> <p>4.2 NM</p> <p>0.9 NM</p>		↑	✧	tr	△
<p>*0.9 NM to RWY 6R</p> <p>*LNAV only</p>					
CATEGORY	A	B	C	D	
LPV DA#		316/24	200 (200-½)		
LNAV/VNAV DA		398/24	282 (300-½)		
LNAV MDA	480/24	364 (400-½)	480/35	364 (400-¾)	
TDZ/CL Rwws 6R, 7L, 24R, and 25L HIRL all Rwws					

SW-3, 24 MAY 2018 to 21 JUN 2018

SW-3, 24 MAY 2018 to 21 JUN 2018