

LOC I-VKE 108.7	APP CRS 311°	Rwy Idg 6401	TDZE 1450
		Apt Elev 1470	

ILS or LOC/DME RWY 31

DEVILS LAKE RGNL (DVL)

NA When local altimeter setting not received, use Cando altimeter setting and increase all DA 63 feet and all MDA 80 feet and increase S-LOC 31 Cat C/D and Circling Cat C/D visibility ¼ mile. For inop MALSR when using Cando altimeter setting, increase S-ILS 31 all Cats visibility to ¾ mile and S-LOC 31 Cat C/D to 1½ mile. DME from DVL VOR/DME. Simultaneous reception of I-VKE and DVL DME required.

MALSR




MISSED APPROACH: Climb to 3200 then left turn direct DVL VOR/DME and hold.


AWOS-3PT
125.875

GRAND FORKS RADIO
122.3


UNICOM
122.8 (CTAF)

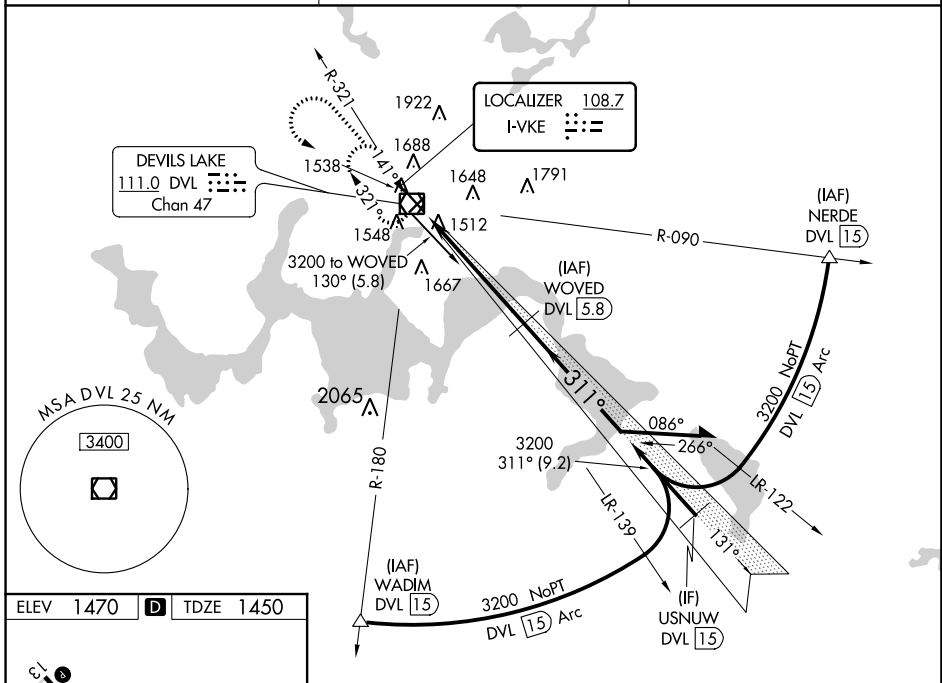

ELEV 1470	D	TDZE 1450
------------------	----------	------------------

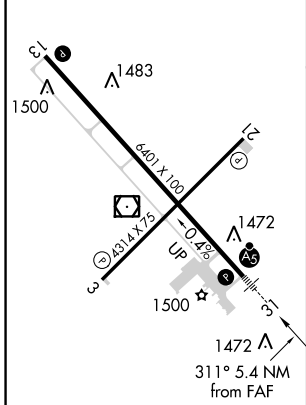

- HIRL Rwy 13-31
- REIL Rwy 3, 13 and 21
- MIRL Rwy 3-21

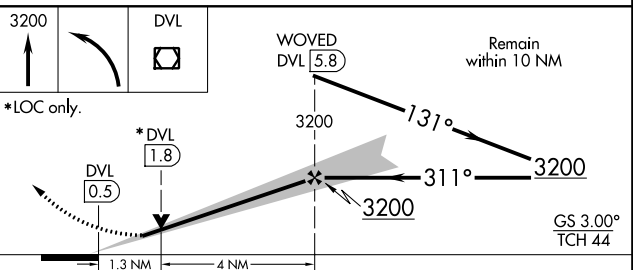

CATEGORY	A	B	C	D
S-ILS 31		1650-½	200 (200-½)	
S-LOC 31		1780-½	330 (400-½)	
C CIRCLING	2000-1	530 (600-1)	2240-2¼ 770 (800-2¼)	2240-2½ 770 (800-2½)