

LOC/DME I-UWU <b>108.5</b> Chan <b>22</b>	APP CRS <b>071°</b>	Rwy Idg 6L <b>8566</b> 6R <b>9748</b> TDZE <b>119</b> <b>116</b> Apt Elev <b>128</b> <b>128</b>
---	------------------------	--


# ILS or LOC RWY 6L

LOS ANGELES INTL (LAX)

**▼** Inop table does not apply to Sidestep 6R Cats A/B. For inop ALS, increase S-LOC 6L Cat C/D visibility to RVR 5500. Simultaneous approach authorized.


MALSR Rwy 6L	MALSR Rwy 6R	MISSED APPROACH: Climb to 600 then climbing left turn to 3000 on LAX VORTAC R-046 to AMTRA INT/LAX 17.3 DME and hold.
--------------	--------------	---

D-ATIS ARR <b>133.8</b> DEP <b>135.65</b>	SOCAL APP CON <b>124.3 363.2</b> <b>124.9 269.0</b> (APCH FM WEST) (090°-224°) <b>124.5 235.975</b> <b>128.5 360.7</b> (225°-044°) (045°-089°)	LOS ANGELES TOWER <b>N 133.9 239.3</b> <b>S 120.95 379.1</b>	GND CON <b>N 121.65 327.0</b> <b>S 121.75 327.0</b> <b>W 121.4 327.0</b>	CLNC DEL <b>120.35</b> <b>327.0</b>	CPDLC
---	--	--	---	---	-------

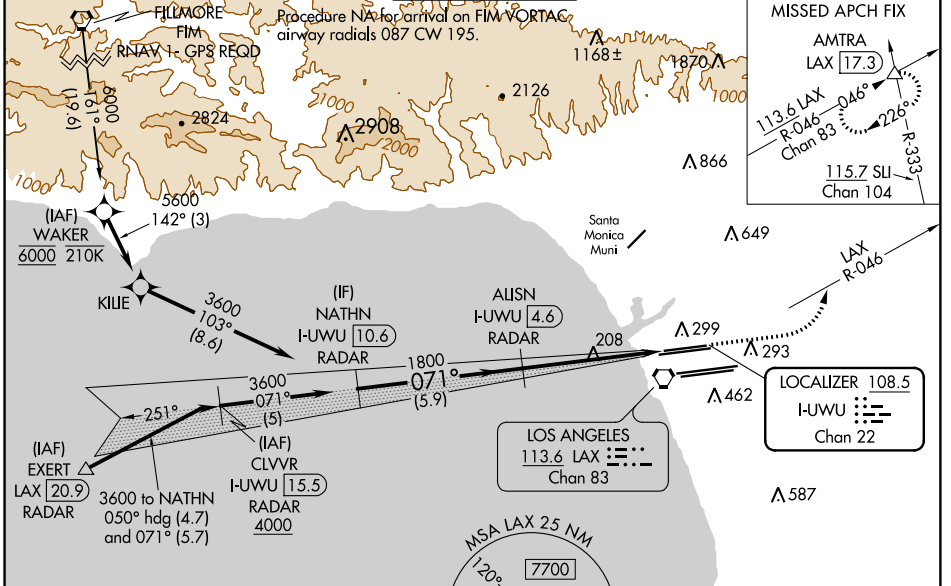

ELEV 128	<b>D</b> TDZE 6L 119	TDZE 6R 116
----------	----------------------	-------------

## DME or RADAR REQUIRED

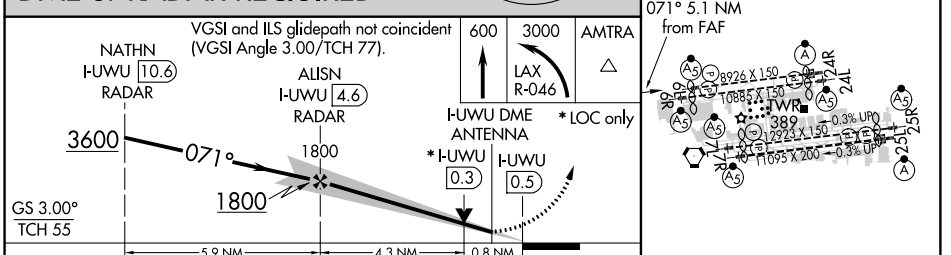

CATEGORY	A	B	C	D
S-ILS 6L	369/24 250 (300-½)			
S-LOC 6L	460/24 341 (400-½)	460/30 341 (400-¾)		
SIDESTEP 6R	460/55 344 (400-1¼)			460-1½ 344 (400-1½)

071° 5.1 NM from FAF

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42