

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 93702 W06A | APP CRS 057° | Rwy Idg TDZE Apt Elev | 7201 2351 2351 |
|--|------------------------|-----------------------------|---|



RNAV (GPS) RWY 6

GENERAL WM J FOX AIRFIELD (WJF)



▼ When VGSi inop, Straight-in/Circling Rwy 6 procedure NA at night.
▲ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 45°C (113°F).
 If local altimeter setting not received, use Palmdale altimeter setting and increase all DA/MDAs 60 feet.
 Baro-VNAV NA when using Palmdale altimeter setting.

MISSED APPROACH: Climb to 6000 direct SISOY and via 091° track to ETHER and hold.

| | | | | |
|----------------------|--------------------------------------|---|-------------------------------|-------------------------|
| ATIS 126.3 | JOSHUA APP CON 126.1 290.3 | FOX TOWER* 118.525 (CTAF) 256.9 | GND CON 121.7 256.9 | UNICOM 122.95 |
|----------------------|--------------------------------------|---|-------------------------------|-------------------------|

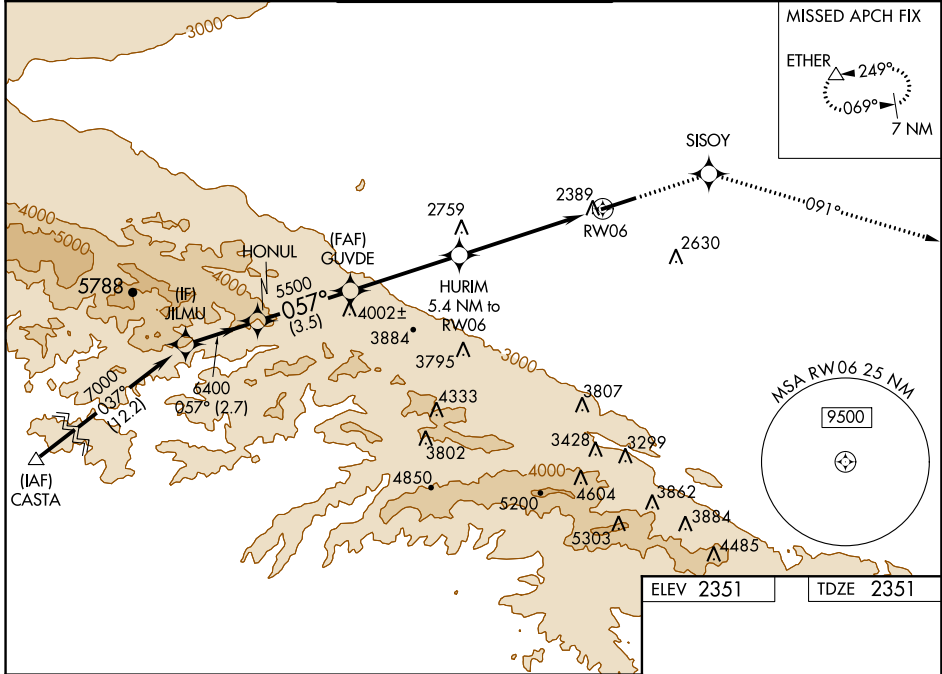

| | |
|-----------|-----------|
| ELEV 2351 | TDZE 2351 |
|-----------|-----------|

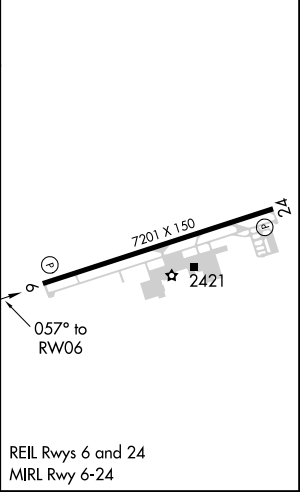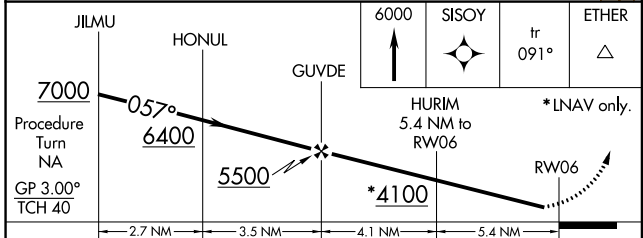

| CATEGORY | A | B | C | D |
|--------------|--------------------|---|----------------------|----------------------|
| LPV DA | 2601-1 | | 250 (300-1) | |
| LNAV/VNAV DA | 2649-1 | | 298 (300-1) | |
| LNAV MDA | 2940-1 589 (600-1) | | 2940-1½ 589 (600-1½) | 2940-1¾ 589 (600-1¾) |
| CIRCLING | 2940-1 589 (600-1) | | 2940-1½ 589 (600-1½) | 2940-2 589 (600-2) |

SW-3, 21 JUN 2018 to 19 JUL 2018

SW-3, 21 JUN 2018 to 19 JUL 2018