LOC I-TXP	APP CRS	Rwy Idg	6000
109.95	249°	TDZE	1038
		Apt Elev	1062

ILS or LOC RWY 25

GWINNETT COUNTY-BRISCOE FIELD (LZU)

T
A NA

When local altimeter setting not received, use Winder altimeter setting and increase all DA 51 feet, and all MDA 60 feet, increase S-LOC 25 Cat C/D and Circling Cat C/D visibility ¼ SM. ADF requried. For inop MALSR, when using Winder altimeter setting increase S-ILS 25 all Cats visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 1800 then climbing left turn to 3000 direct GWNET LOM and hold.

ATIS	ATLANTA APP CON	GWINNETT TOWER ★	GND CON	CLNC DEL	ATLANTA CLNC DEL	UNICOM
132.275	126.975 239.275	124.1 (CTAF) L	121.8	121.8	134.0 (When tower closed)	123.05

ADF or RADAR REQUIRED

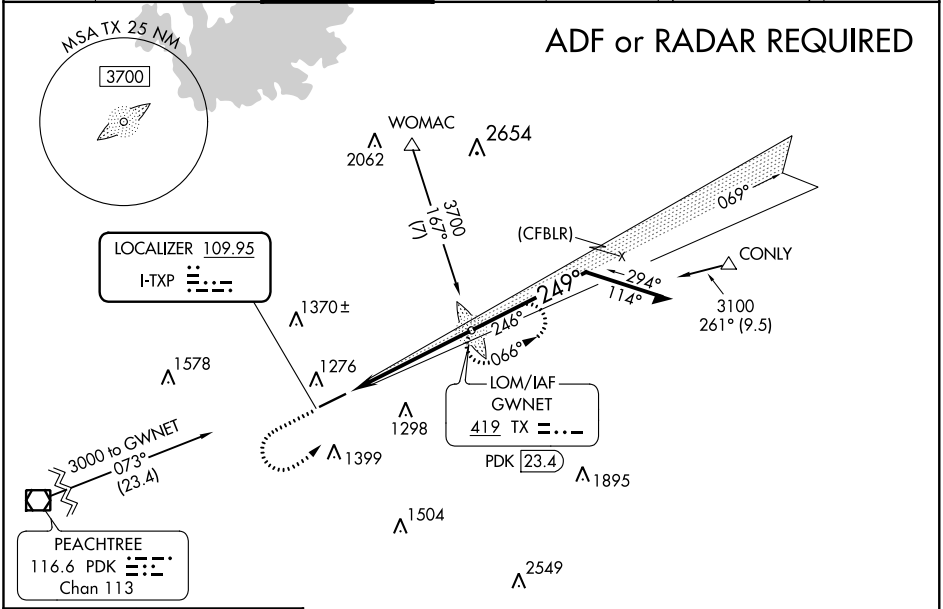

ELEV 1062	TDZE 1038



HIRL Rwy 7-25 L

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

ALTERNATIVE MISSED APCH FIX

GWNET
419 TX
PDK 23.4

253°
073°

1800	3000	GWNET

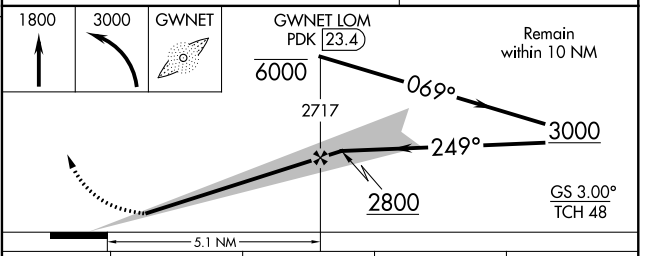

CATEGORY	A	B	C	D
S-ILS 25	1238-½ 200 (200-½)			
S-LOC 25	1540-½ 502 (500-½)		1540-1 502 (500-1)	
CIRCLING	1640-1 578 (600-1)		1640-1½ 578 (600-1½)	1700-2 638 (700-2)

SE-4, 13 SEP 2018 to 11 OCT 2018
SE-4, 13 SEP 2018 to 11 OCT 2018