WAAS	APP CRS	Rwy Idg	11095
CH 53507	251°	TDZE	104
W25A		Apt Elev	128

RNAV (GPS) Y RWY 25L

LOS ANGELES INTL (LAX)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C (41°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to RVR 4500. Simultaneous approach authorized. Simultaneous approach authorized with HHR 25. LNAV only approach NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 2000 direct ZERAN and on track 187° to CATLY and hold.

D-ATIS	SOCAL APP CON		LOS ANGELES TOWER	GND CON	CLNC DEL	CPDLC
ARR 133.8	124.3 363.2 (APCH FM WEST)	124.9 269.0 (090°-224°)	N 133.9 239.3	N 121.65 327.0	120.35	
DEP 135.65	124.5 235.975 (225°-044°)	128.5 360.7 (045°-089°)	S 120.95 379.1	S 121.75 327.0 W 121.4 327.0	327.0	

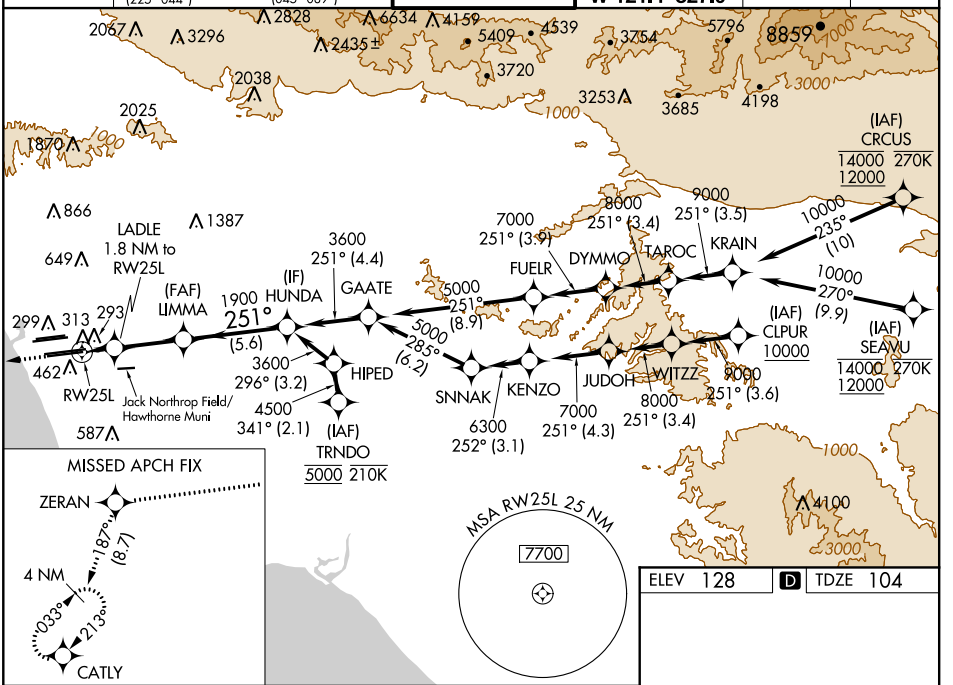

CATEGORY	A	B	C	D
LPV DA	365/20 261 (300-½)			
LNAV/VNAV DA	575/60 471 (500-1¼)			
LNAV MDA	640/24 536 (600-½)		640/55 536 (600-1)	

TDZ/CL Rwys 6R, 7L, 24R, and 25L
HIRL all Rwys

SW-3, 28 MAR 2019 to 25 APR 2019
SW-3, 28 MAR 2019 to 25 APR 2019