
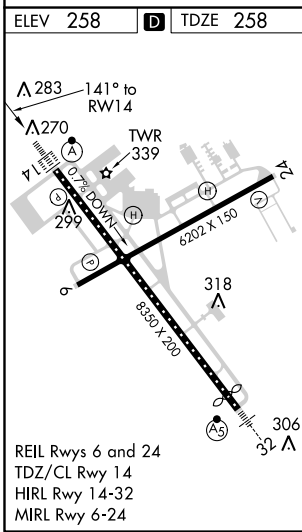


WAAS CH 45913 W14A	APP CRS 141°	Rwy Idg TDZE Apt Elev	7976 258 258
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 14

SHREVEPORT RGNL (SHV)

RNP APCH		SHREVEPORT TOWER		GND CON		CLNC DEL	
For inop ALS, increase LNAV Cat C and D visibility to RVR 6000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C.		121.4 236.775		121.9 236.775		124.65	
ATIS	SHREVEPORT APP CON	SHREVEPORT TOWER		GND CON		CLNC DEL	
128.45	119.9 335.55	121.4 236.775		121.9 236.775		124.65	

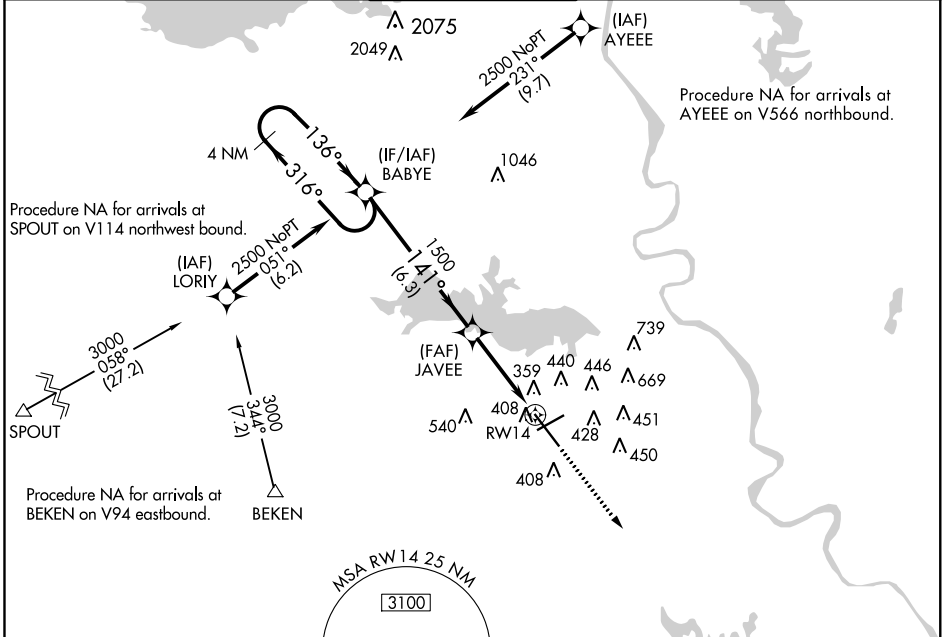

4 NM Holding Pattern		BABYE		3000		COBAV	
2500		1500		1500		*1.1 NM to RWY 14	
GP 3.00°		TCH 51		6.3 NM		2.6 NM	
316°		136°		141°		1500	
136°		141°		1500		*LNAV only.	
136°		141°		1500		1.1 NM	
CATEGORY	A	B	C	D			
LPV DA		458/18	200 (200-1/2)				
LNAV/VNAV DA		640/40	382 (400-3/4)				
LNAV MDA	660/24	402 (500-1/2)	660/40	402 (500-3/4)			
CIRCLING	760-1	502 (600-1)	980-2	722 (800-2)	1100-2 3/4	842 (900-2 3/4)	

SC-4, 28 MAR 2019 to 25 APR 2019

SC-4, 28 MAR 2019 to 25 APR 2019