

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>77914</b><br><b>W18A</b> | APP CRS<br><b>177°</b> | Rwy Idg<br>TDZE <b>104</b><br>Apt Elev <b>107</b> |
|----------------------------------------|------------------------|---------------------------------------------------|


# RNAV (GPS) RWY 18

ALLEN PARISH (ACP)

Baro-VNAV NA when using Alexandria Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA when using Alexandria Intl altimeter setting. When local altimeter setting not received, use Alexandria Intl altimeter setting and increase all DA 84 feet, all MDA 100 feet. Increase LPV and LNAV/VNAV all Cats visibility ¼ mile, LNAV Cat C visibility ½ mile and Circling Cat C visibility ¼ mile.



MISSED APPROACH: Climb to 2000 direct ONICE and hold.

|                            |                                    |                               |
|----------------------------|------------------------------------|-------------------------------|
| AWOS-3PT<br><b>118.275</b> | POLK APP CON<br><b>123.7 261.3</b> | UNICOM<br><b>122.8 (CTAF)</b> |
|----------------------------|------------------------------------|-------------------------------|

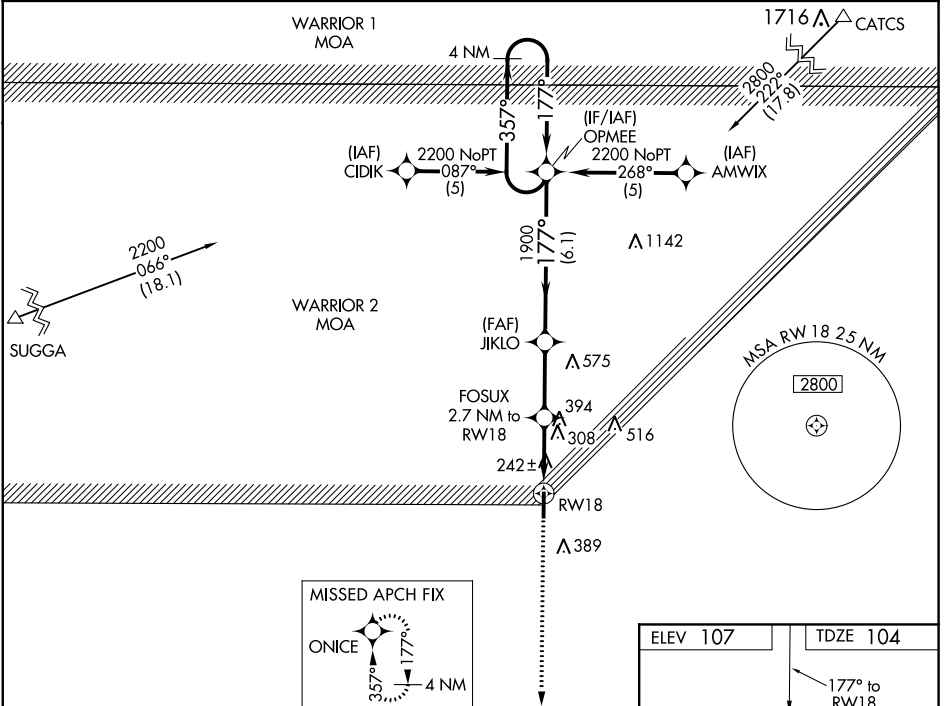

SC-4, 25 APR 2019 to 23 MAY 2019

SC-4, 25 APR 2019 to 23 MAY 2019

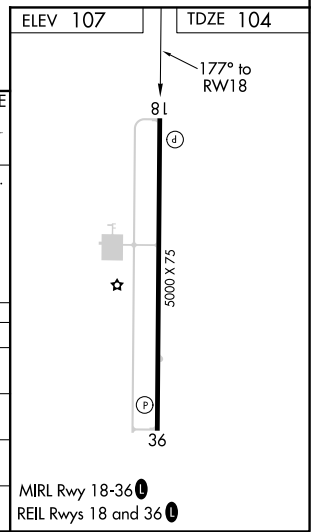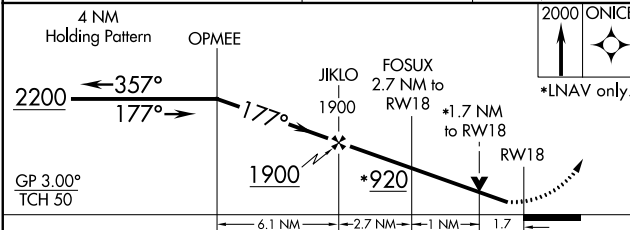

| CATEGORY      | A                    | B                    | C                      | D  |
|---------------|----------------------|----------------------|------------------------|----|
| LPV DA        | 515-1½               | 411 (500-1½)         |                        | NA |
| LNAV/ VNAV DA | 549-1½               | 445 (500-1½)         |                        | NA |
| LNAV MDA      | 700-1                | 596 (600-1)          | 700-1½<br>596 (600-1½) | NA |
| CIRCLING      | 700-1<br>593 (600-1) | 740-1<br>633 (700-1) | 740-1¾<br>633 (700-1¾) | NA |