


|                |             |          |             |
|----------------|-------------|----------|-------------|
| LOC/DME I-SJT  | APP CRS     | Rwy Idg  | <b>5939</b> |
| <b>109.7</b>   | <b>038°</b> | TDZE     | <b>1917</b> |
| Chan <b>34</b> |             | Apt Elev | <b>1919</b> |

# ILS Y or LOC Y RWY 3

SAN ANGELO RGNL/MATHIS FIELD (SJT)


|   |       |   |
|---|-------|---|
| ADF or DME required for procedure entry.  | MALSR | MISSED APPROACH: Climb to 4000, then right turn direct SJT VORTAC and hold. |
| <p><b>▲</b> For Inop ALS, increase S-ILS 03 Cat E visibility to RVR 4000, S-LOC 03 Cat C/D/E visibility to 2 SM. Circling NA for Cat E west of Rwy 18-36. ERRNY DME Minimums:</p> <p><b>▲</b> For Inop ALS, increase S-LOC 03 Cat C/D/E visibility to RVR 5500.</p> <p>ASR # RVR 1800 authorized with use of AP or HUD to DA.</p> |       |   |

|                             |   |   |                               |                         |
|-----------------------------|---|---|-------------------------------|-------------------------|
| ATIS<br><b>128.45 319.0</b> | SAN ANGELO APP CON ★<br><b>125.35 354.1</b> | MATHIS TOWER ★<br><b>118.3 (CTAF) 284.7</b> | GND CON<br><b>121.9 348.6</b> | UNICOM<br><b>122.95</b> |
|-----------------------------|---|---|-------------------------------|-------------------------|

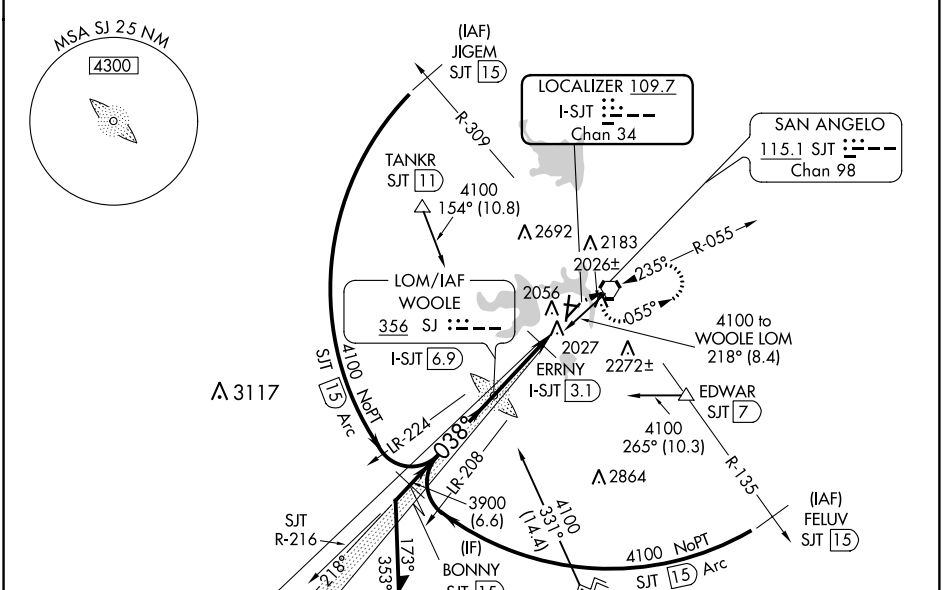


|           |          |           |
|-----------|----------|-----------|
| ELEV 1919 | <b>D</b> | TDZE 1917 |
|-----------|----------|-----------|

MIRL Rws 9-27 and 18-36  
HIRL Rwy 3-21  
REIL Rws 18

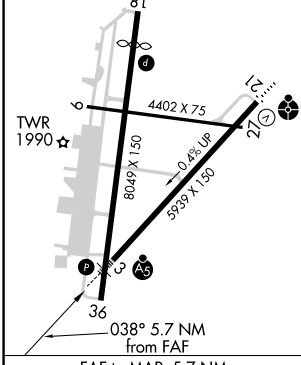

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 5:42 | 3:48 | 2:51 | 2:17 | 1:54 |

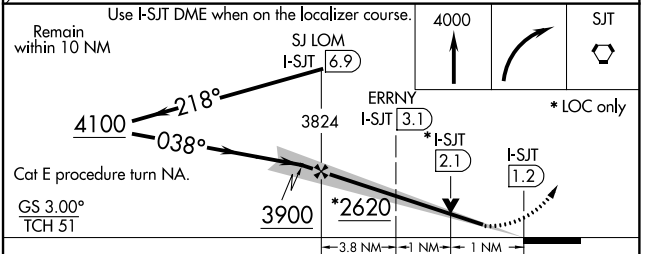

|                    |                     |             |              |              |              |
|--------------------|---------------------|-------------|--------------|--------------|--------------|
| CATEGORY           | A                   | B           | C            | D            | E            |
| S-ILS 3 #          | 2117/24 200 (200-½) |             |              |              |              |
| S-LOC 3            | 2620/24             | 703 (800-½) | 2620-1½      | 703 (800-1½) |              |
| <b>C</b> CIRCLING  | 2620-1              | 701 (800-1) | 2620-2       | 2700-2½      | 2700-2¾      |
|                    |                     |             | 701 (800-2)  | 781 (800-2½) | 781 (800-2¾) |
| ERRNY DME MINIMUMS |                     |             |              |              |              |
| S-LOC 3            | 2280/24             | 363 (400-½) | 2280/35      | 363 (400-¾)  |              |
| <b>C</b> CIRCLING  | 2360-1              | 2380-1      | 2500-1½      | 2700-2½      | 2700-2¾      |
|                    | 441 (500-1)         | 461 (500-1) | 581 (600-1½) | 781 (800-2½) | 781 (800-2¾) |

SC-3, 15 AUG 2019 to 12 SEP 2019

SC-3, 15 AUG 2019 to 12 SEP 2019