



BNDIA TWO DEPARTURE (RNAV)

**TOP ALTITUDE:
ASSIGNED BY ATC**

- D-ATIS 124.4
- CLNC DEL 125.5 263.0
- CPDLC 121.9 348.6
- GND CON 121.0 281.5
- AUSTIN TOWER 119.0 370.85
- AUSTIN DEP CON



NOTE: RADAR required.
 NOTE: DME/DME/IRU or GPS required.
 NOTE: RNAV-1.

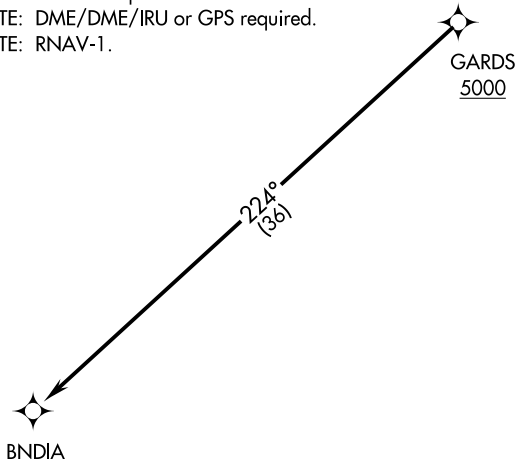

TAKEOFF MINIMUMS:
 Rwy 17L/R: Standard.
 Rwy 35L/R: Standard with minimum climb of 240' per NM to 2600.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

RWYS 17L/R: Climb heading 175° or as assigned by ATC for RADAR vectors to cross GARDS at or above 5000, thence

RWYS 35L/R: Climb heading 355° or as assigned by ATC for RADAR vectors to cross GARDS at or above 5000, thence

. . . . on track 224° to BNDIA. Maintain altitude assigned by ATC. Expect filed altitude 10 minutes after departure.