




LOC I-JVY 111.7	APP CRS 182°	Rwy Idg TDZE Apt Elev	7000 476 476
---------------------------	------------------------	-----------------------------	-----------------------------------------

ILS or LOC RWY 18

CLARK RGNL (JVY)

ADF required. RADAR required for procedure entry.		MALS R A5	MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 direct CATCH LOM and hold.
Circling NA for Cat D southwest of Rws 14 and 36. Circling Rwy 14, 32 NA at night. NA For inop ALS, increase S-LOC 18 Cats C and D visibility to 1 1/2 SM. When local altimeter setting not received, use Louisville Muhammad Ali Intl altimeter setting: increase DA to 706; increase all MDAs 40 feet, S-LOC 18 Cats C and D visibility 1/2 SM and Circling Cat C visibility 1/4 SM.			

AWOS-3 118.575	LOUISVILLE APP CON 132.075 327.0	CLNC DEL 118.05	UNICOM 122.7 (CTAF)
--------------------------	--------------------------------------------	---------------------------	-------------------------------

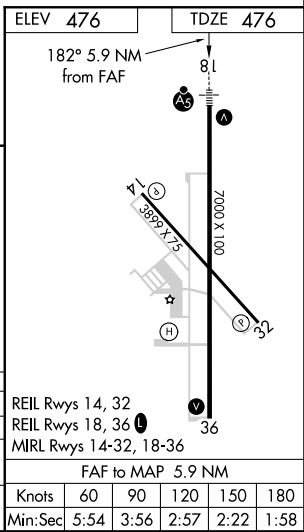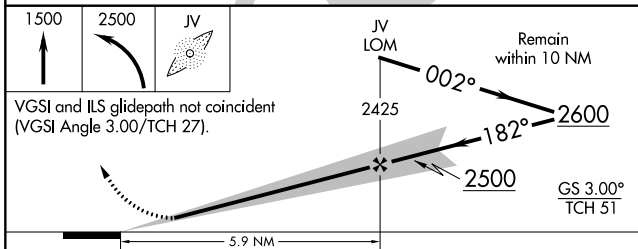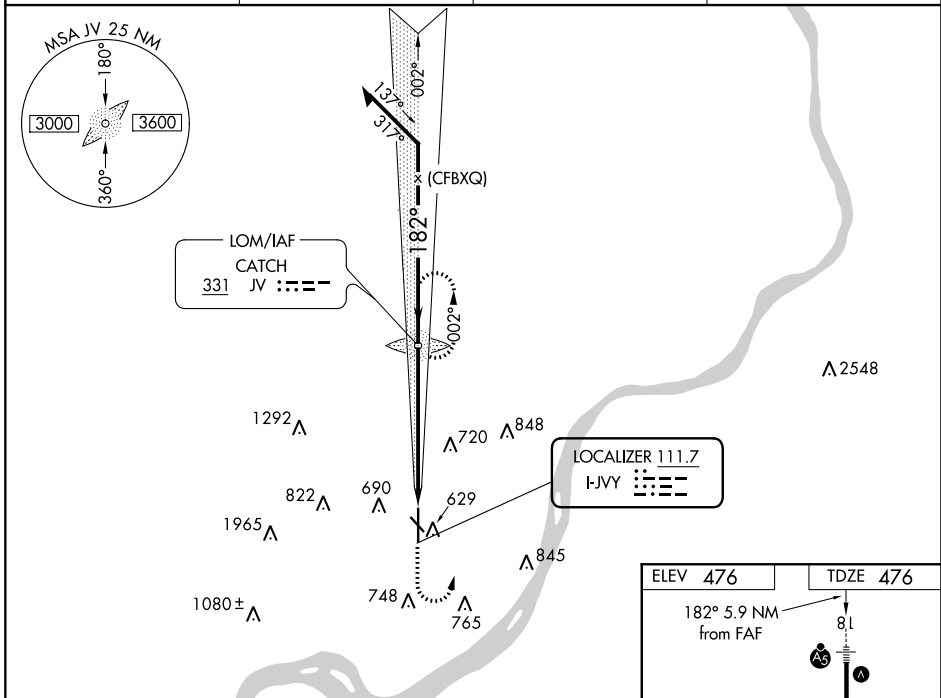

CATEGORY	A	B	C	D
S-ILS 18		676-1/2	200 (200-1/2)	
S-LOC 18	980-1/2	504 (600-1/2)	980-1	504 (600-1)
CIRCLING	1000-1 524 (600-1)	1040-1 564 (600-1)	1060-1/2 584 (600-1/2)	1100-2 624 (700-2)

EC-2, 15 AUG 2019 to 12 SEP 2019

EC-2, 15 AUG 2019 to 12 SEP 2019