




APP CRS <b>216°</b>	Rwy Idg <b>10000</b>
	TDZE <b>642</b>
	Apt Elev <b>645</b>

# RNAV (RNP) W RWY 22R


DETROIT METROPOLITAN WAYNE COUNTY (DTW)

RNP AR APCH.		MALSR 	MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct DOHNT and hold.
▽ For uncompensated Baro-VNAV systems, procedure NA below -1°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 5500.			

D-ATIS <b>133.675</b>	DETROIT APP CON <b>124.05 284.0</b>	METRO TOWER <b>135.0 317.725</b>	GND CON <b>121.8</b> (NW) <b>119.45</b> (NE) <b>132.725</b> (SW) <b>119.25</b> (SE)	CLNC DEL <b>120.65</b>	CPDLC
--------------------------	--	-------------------------------------	---	---------------------------	-------

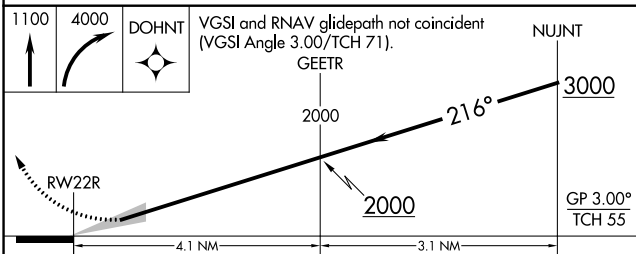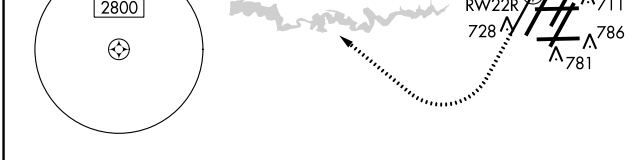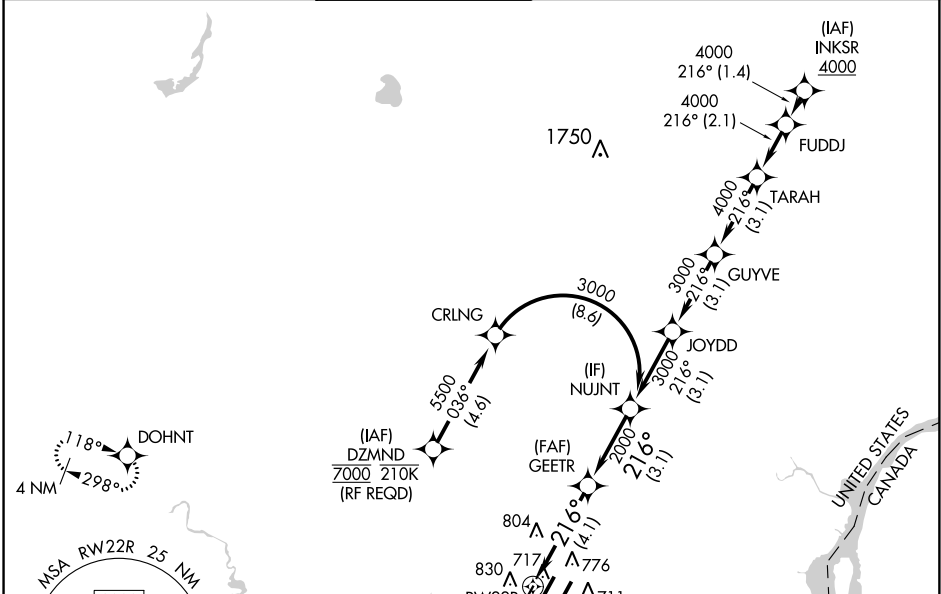

ELEV	645	TDZE	642
------	-----	------	-----

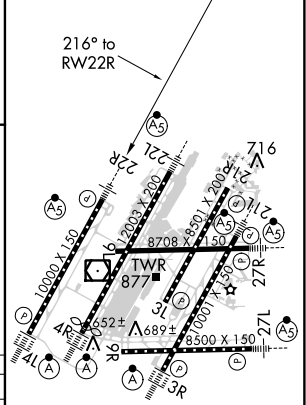

CATEGORY	A	B	C	D
RNP 0.30 DA	987/30 345 (400-5/8)			

## AUTHORIZATION REQUIRED

TDZ/Cl Rwys 3R, 4L, 4R, and 22R  
 REIL Rwys 3L, 9L, 9R, and 21R  
 HIRL all runways