


APP CRS	Rwy Idg	<b>12003</b>
<b>216°</b>	TDZE	<b>637</b>
	Apt Elev	<b>645</b>


# RNAV (RNP) X RWY 22L

DETROIT METROPOLITAN WAYNE COUNTY (DTW)

RNP AR APCH.		METRO TOWER <b>128.125 317.725</b>		GND CON <b>121.8 (NW) 119.45 (NE)</b> <b>132.725 (SW) 119.25 (SE)</b>		MALS R	MISSED APPROACH: Climb to 4000 direct HWLNR and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 54°C (130°F). Simultaneous approach authorized. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000.		D-ATIS <b>133.675</b>		DETROIT APP CON <b>124.05 284.0</b>		CLNC DEL <b>120.65</b>	CPDLC

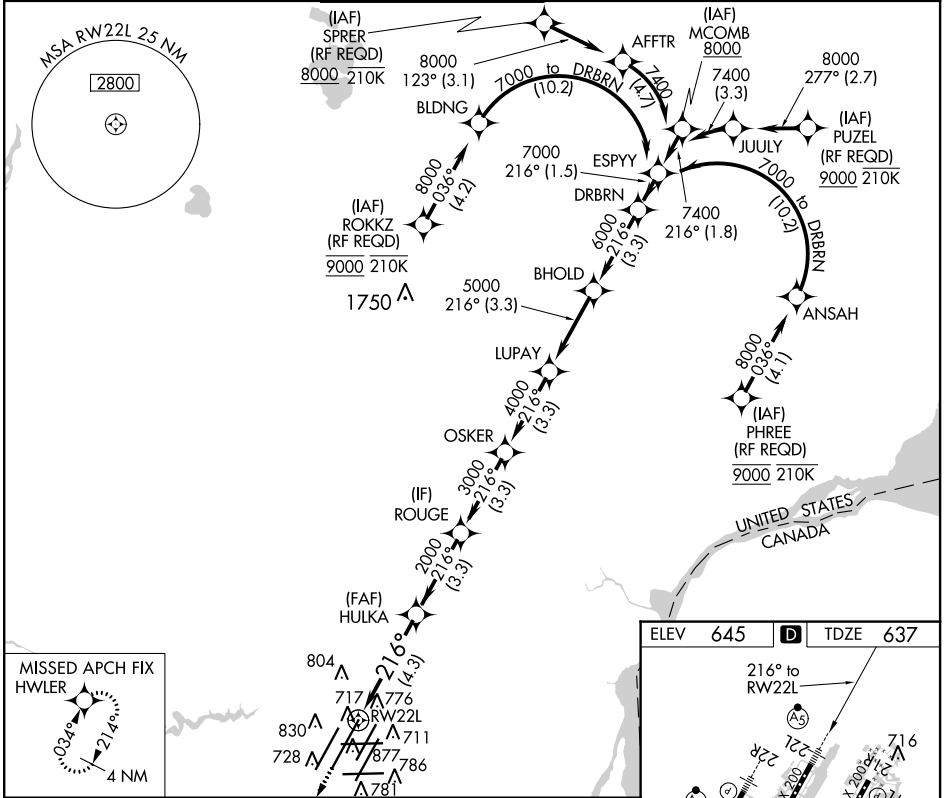

4000	↑	HWLNR	DRBRN
	HULKA	ROUGE	OSKER
	2000	3000	4000
		LUPAY	BHOLD
		5000	6000
			7000
			GP 2.85°
			TCH 60
	4.3 NM	3.3 NM	3.3 NM
CATEGORY	A	B	C
RNP 0.15 DA		941/24	304 (300-½)
RNP 0.30 DA		1040/40	403 (400-¾)

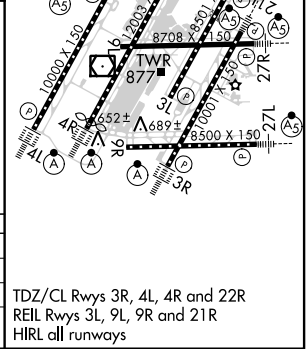

## AUTHORIZATION REQUIRED

EC-1, 12 SEP 2019 to 10 OCT 2019

EC-1, 12 SEP 2019 to 10 OCT 2019