ILS or LOC RWY 22

HANCOCK COUNTY-BAR HARBOR (BHB)

LOC/DME I-BHB	APP CRS	Rwy Idg	5200
108.3	224°	TDZE	83
Chan 20		Apt Elev	83

DME Required.

When local altimeter setting not received, use Bangor altimeter setting and increase all DA 83 feet and all MDA 100 feet; increase S-ILS 22 all Cats visibility ¼ ; S-LOC 22 Cat C/D visibility ½ mile and Circling Cat C/D visibility ¼ mile; increase JESUL fix minimums S-LOC 22 Cat C/D and Circling Cat C/D visibility ¼ mile. Inoperative table does not apply to S-LOC 22 Cat C and JESUL fix minimums S-LOC 22 Cat C. When using Bangor altimeter setting; inoperative table does not apply to S-LOC 22 Cat C and JESUL fix minimums S-LOC 22 Cat C. VDP NA with Bangor altimeter setting. Circling to Rwy 17 NA at night.

MALSF

MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 direct BGR VORTAC and hold.

AWOS-3PT	BANGOR APP CON	CLNC DEL	UNICOM	
118.35	133.6 284.65	119.9	123.0 (CTAF)	122.7 L

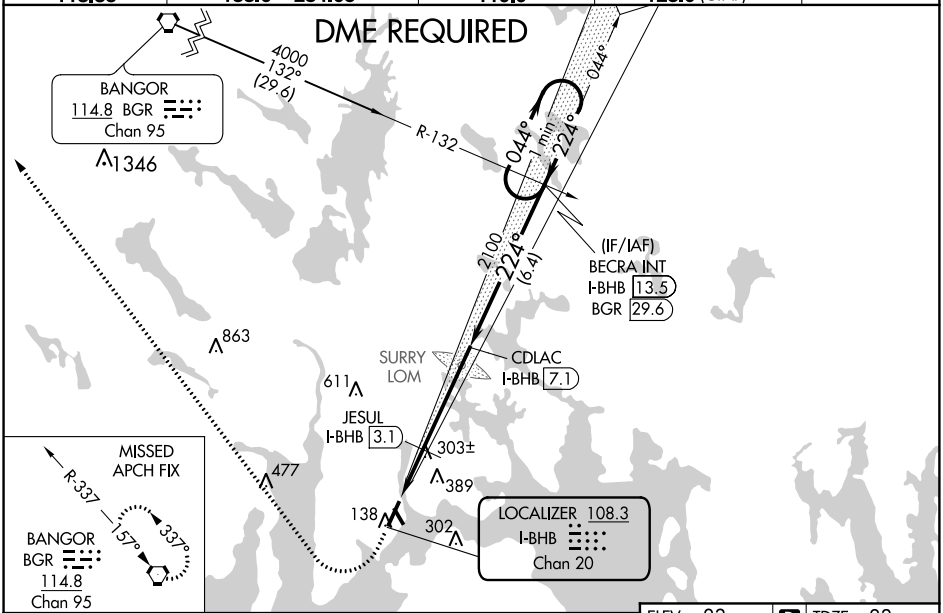

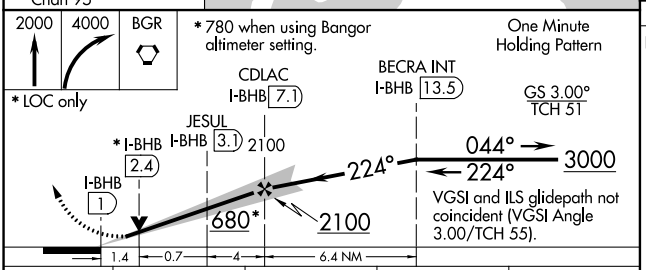

CATEGORY	A	B	C	D
S-ILS 22	283-¾ 200 (200-¾)			
S-LOC 22	680-¾ 597 (600-¾)		680-1½ 597 (600-1½)	680-1¾ 597 (600-1¾)
CIRCLING	680-1 597 (600-1)		700-1¾ 617 (700-1¾)	700-2 617 (700-2)
JESUL FIX MINIMUMS				
S-LOC 22	580-¾ 497 (500-¾)		580-1¼ 497 (500-1¼)	580-1½ 497 (500-1½)
CIRCLING	600-1 517 (600-1)	620-1 537 (600-1)	700-1¾ 617 (700-1¾)	700-2 617 (700-2)

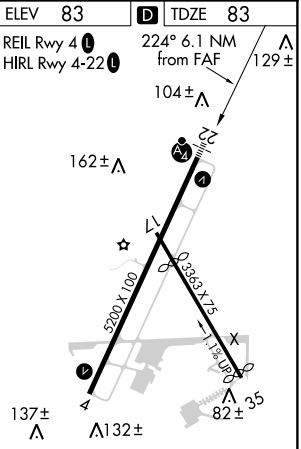

FAF to MAP 6.1 NM					
Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

NE-1, 12 SEP 2019 to 10 OCT 2019
NE-1, 12 SEP 2019 to 10 OCT 2019