

LOC/DME I-ARA 108.9 Chan 26	APP CRS 348°	Rwy Idg TDZE 21 Apt Elev 24	8002
---	------------------------	---	-------------

ILS or LOC RWY 35


ACADIANA RGNL (A.R.A)

▼ Circling NA to Rwys 17W and 35W. ADF or DME required.
 For inop ALS, increase S-ILS 35 Cat E visibility to 3/4 SM,
 ▲ S-LOC 35 Cat E visibility to 1 1/2 SM, and UXYAP FIX minimums
 S-LOC 35 Cats C/D/E visibility to 1 SM.






MISSED APPROACH: Climb to 800 then climbing right turn to 2000 on heading 080° and LFT R-114 to CLYNT INT/LFT 18.8 DME and hold.

ASOS 133.325	LAFAYETTE APP CON * 121.1 268.7	ACADIANA TOWER * 125.0 (CTAF) 239.3	GND CON 121.7	CLNC DEL 121.7 118.05 (when twr closed)	UNICOM 122.95	0 * 122.7
------------------------	---	---	-------------------------	---	-------------------------	----------------------------

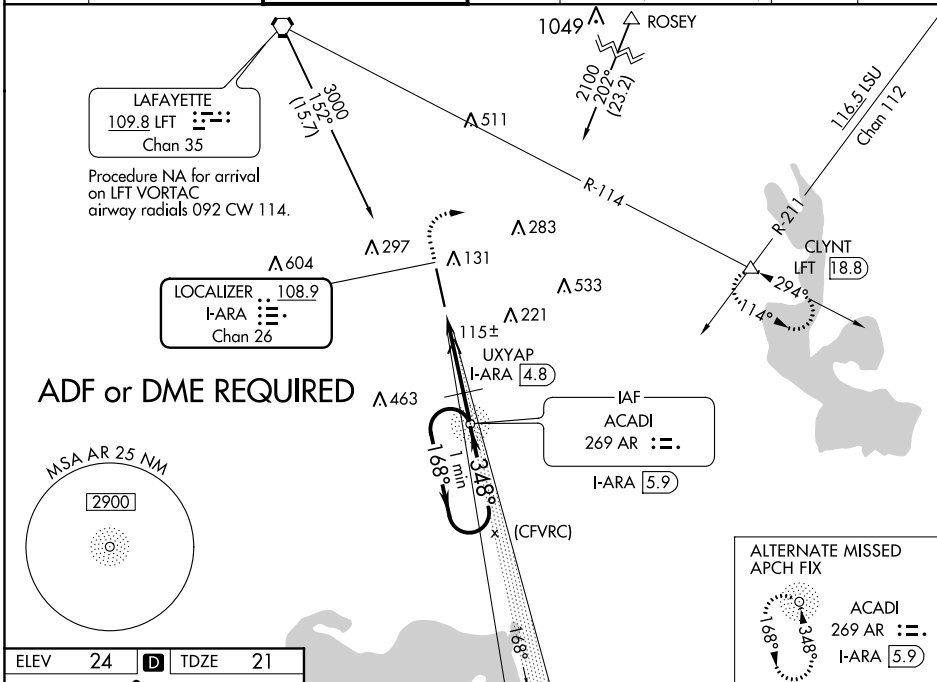

ELEV 24	D	TDZE 21
----------------	----------	----------------

HIRL Rwy 17-35 **1**
 MIRL Rwy 17W-35W **1 ***

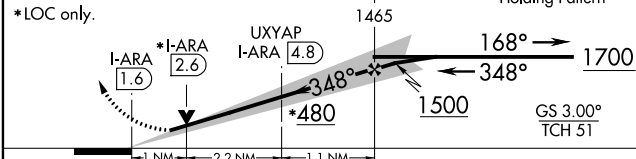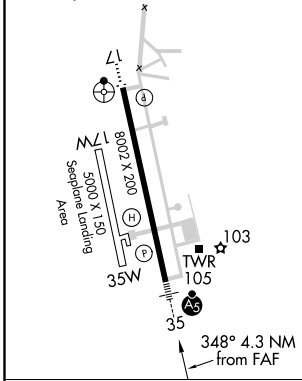

CATEGORY	A	B	C	D	E
S-ILS 35	221-1/2 200 (200-1/2)				
S-LOC 35	480-1/2	459 (500-1/2)	480-7/8		459 (500-7/8)
C CIRCLING	480-1	456 (500-1)	600-1 1/2	680-2	900-3
			576 (600-1 1/2)	656 (700-2)	876 (900-3)
UXYAP FIX MINIMUMS (DME REQUIRED)					
S-LOC 35	380-1/2	359 (400-1/2)	380-5/8		359 (400-5/8)
C CIRCLING	440-1	480-1	600-1 1/2	680-2	900-3
	416 (500-1)	456 (500-1)	576 (600-1 1/2)	656 (700-2)	876 (900-3)

FAF to MAP 4.3 NM

Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26