LOC I-VKE	APP CRS	Rwy Idg	6401
108.7	311°	TDZE	1450
		Apt Elev	1470

ILS or LOC/DME RWY 31

DEVILS LAKE RGNL (DVL)

When local altimeter setting not received, use Cando altimeter setting and increase all DA 63 feet and all MDA 80 feet and increase S-LOC 31 Cat C/D and Circling Cat C/D visibility ¼ mile. For inop MALSR when using Cando altimeter setting, increase S-ILS 31 all Cats visibility to ⅞ mile and S-LOC 31 Cat C/D to 1⅛ mile. DME from DVL VOR/DME. Simultaneous reception of I-VKE and DVL DME required.

NA

MALSR

MISSED APPROACH: Climb to 3200 then left turn direct DVL VOR/DME and hold.

AWOS-3PT	MINNEAPOLIS CENTER	GRAND FORKS RADIO	UNICOM
125.875	124.2 270.3	122.3	122.8 (CTAF)

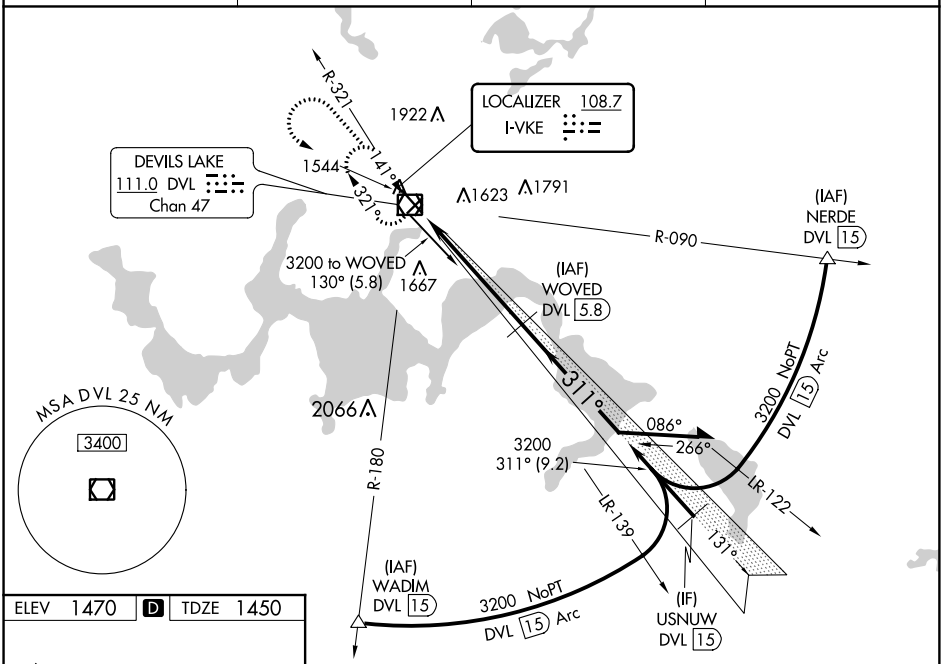

ELEV 1470 D TDZE 1450

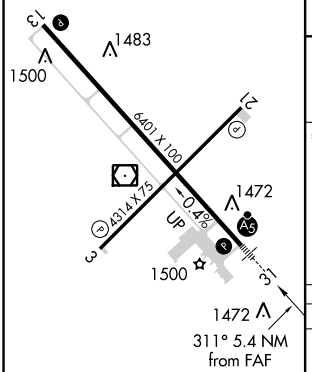

HIRL Rwy 13-31
REIL Rwys 3, 13 and 21
MIRL Rwy 3-21

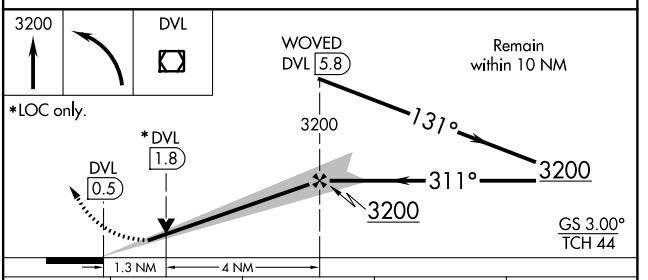

CATEGORY	A	B	C	D
S-ILS 31	1650-½ 200 (200-½)			
S-LOC 31	1780-½ 330 (400-½)			
C CIRCLING	2000-1 530 (600-1)		2240-2¼ 770 (800-2¼)	2240-2½ 770 (800-2½)

NC-1, 12 SEP 2019 to 10 OCT 2019
NC-1, 12 SEP 2019 to 10 OCT 2019