

**ORLANDO INTL** (MCO)(KMCO) P (AF) 6 SE UTC-5(-4DT) N28°25.76' W81°18.54'

96 B LRA Class I, ARFF Index E NOTAM FILE MCO

**RWY 18L-36R:** H12005X200 (ASPH-CONC-GRVD) S-165, D-200, 2S-175, 2D-400 PCN 97 R/B/W/T HIRL CL

**RWY 18L:** PAPI(P4L)—GA 3.0° TCH 71'. RVR-TMR

**RWY 36R:** ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 70'. RVR-TMR

**RWY 18R-36L:** H12004X200 (ASPH-CONC-GRVD) S-100, D-200, 2S-175, 2D-400 PCN 104R/B/W/T HIRL CL

**RWY 18R:** MALS. TDZL. PAPI(P4L)—GA 3.0° TCH 71'. RVR-TMR

**RWY 36L:** REIL. PAPI(P4L)—GA 3.0° TCH 69'. RVR-TMR

**RWY 17R-35L:** H10000X150 (CONC-GRVD) S-75, D-210, 2S-175, 2D-400 PCN 106R/B/W/T HIRL CL

**RWY 17R:** ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 71'. RVR-TMR

**RWY 35L:** ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 72'. RVR-TMR

**RWY 17L-35R:** H9001X150 (CONC-GRVD) S-75, D-210, 2D-420, 2D/2D2-900 PCN 116R/B/W/T HIRL CL

**RWY 17L:** ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 72'. RVR-TMR

**RWY 35R:** ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 73'. RVR-TMR

**RUNWAY DECLARED DISTANCE INFORMATION**

**RWY 17L:**TORA-9000 TODA-9000 ASDA-9000 LDA-9000

**RWY 17R:**TORA-10000 TODA-10000 ASDA-10000 LDA-10000

**RWY 18L:**TORA-12005 TODA-12005 ASDA-12005 LDA-12005

**RWY 18R:**TORA-12004 TODA-12004 ASDA-12004 LDA-12004

**RWY 35L:**TORA-10000 TODA-10000 ASDA-10000 LDA-10000

**RWY 35R:**TORA-9000 TODA-9000 ASDA-9000 LDA-9000

**RWY 36L:**TORA-12004 TODA-12004 ASDA-11621 LDA-11621

**RWY 36R:**TORA-12005 TODA-12005 ASDA-11601 LDA-11601

**SERVICE:** S2 FUEL 100LL, JET A LGT Rwy 17L-35R TDZL unlit 0400-1100Z†. **MILITARY—FUEL A, A+** (C407-851-8304.) (NC-100LL)

**AIRPORT REMARKS:** Attended continuously. CAUTION Birds and deer on and in/ov arpt. Use caution in/ov Twy A along west ramp. Rwy 18L-36R ctr 75' keel section of rwy conc full length, ctr 100' keel section of rwy conc first 1000', both ends. Rest of rwy width is asph. Rwy 18R-36L ctr 87' keel section of rwy conc full length, rest of rwy width is asph. Last 3000' of Rwy 18R is conc full width. ASDE-X in use. Operate transponders with altitude reporting mode and ADS-B (if equipped) enabled on all airport surfaces. Unless advised by ATIS, dep flts on initial ctc with GND CON, acft on West ramp, Airside 1 and 3 (Gates 1-59) use GND CON 121.8. Acft at Airside 2 and 4 (Gates 60 and higher), use GND CON 126.4. When ORL ILS Rwy 07 and MCO ILS Rwy 17 and 18R simultaneous ops are conducted, ATC radar rqrd. Bright lgts on road btn Rwy 17R-35L and Rwy 17L-35R may be mistaken for rwy lgts. Acft with wingspan greater than 214' must adhere to specific rwy and taxi rts. Ctc afd ops at 407-825-2036 for details. Rwy status lgts are in opr. Avoid ctc with twy edge lgts, all acft determined to be FAA Design Group IV and abv must perform judgmental oversteering instead of cockpit cntrl steering when taxiing. Twy J3 and Twy J4 rstd to wingspan of less than 118'. Twy A, south of Twy A3, rstd to wingspan of less than 118'. PPR rqrd for wingspan 118' or greater. West ramp customs inspection parking area rstd to acft wingspan less than 118'. Twy A, btn W ramp S end and Twy B10, rstd to acft wingspan less than 171'. PPR for acft wingspan 171' or greater. Flight Notification Service (ADCUS) avbl.

**AIRPORT MANAGER:** 407-825-7445

**WEATHER DATA SOURCES:** ASOS (407) 855-5235 LLWAS. TDWR.

**COMMUNICATIONS:** D-ATIS ARR 121.25 D-ATIS DEP 120.525 UNICOM 122.95

① **ORLANDO APP/DEP CON** 119.4 (181°-310° 5500' and blo) 119.4 (061°-180° 4500' and blo) 135.3 (311°-060° 5500' and blo) 120.15 (181°-359° abv 5500') 124.8 (000°-180° abv 5000')

**TOWER** 118.45 (Rwy 17L-35R; Rwy 17R-35L) 124.3 (Rwy 18L-36R; Rwy 18R-36L)

**GND CON** 121.8 (West) 126.4 (East) **CLNC DEL** 134.7

**CPDLC** (LOGON KUSA) **AR OPS** 41.5 148.8

**AIRSPACE:** CLASS B See VFR Terminal Area Chart.

**RADIO AIDS TO NAVIGATION:** NOTAM FILE ORL.

(H) **VORTACW** 112.2 ORL Chan 59 N28°32.56' W81°20.10' 169° 6.9 NM to fld. 102/0E. **HIWAS.**

TACAN AZIMUTH unusable:

066°-084°

246°-289° byd 17 NM blo 2,000'

246°-289° byd 28 NM blo 2,500'

**ILS/DME** 110.95 I-ARK Chan 46(Y) Rwy 17L. Class IIE.

**ILS/DME** 111.75 I-DIZ Chan 54(Y) Rwy 17R. Class IIE.


**ILS/DME** 111.9 I-TFE Chan 56 Rwy 18R. Class IA.

**ILS/DME** 110.5 I-DDO Chan 42 Rwy 35L. Class III.

**ILS/DME** 111.15 I-CER Chan 48(Y) Rwy 35R. Class IIE.

**ILS/DME** 110.7 I-OJP Chan 44 Rwy 36R. Class III.

**HELIPAD H1:** H44X44 (CONC)

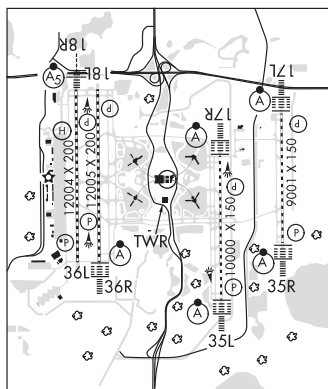

**JACKSONVILLE**  
H-8H, L-21D, 24F  
IAP, AD